



Operating Manual

Version 2.0.1

Bench drill

OPTidrill®
B 16H

Part no. 3020217

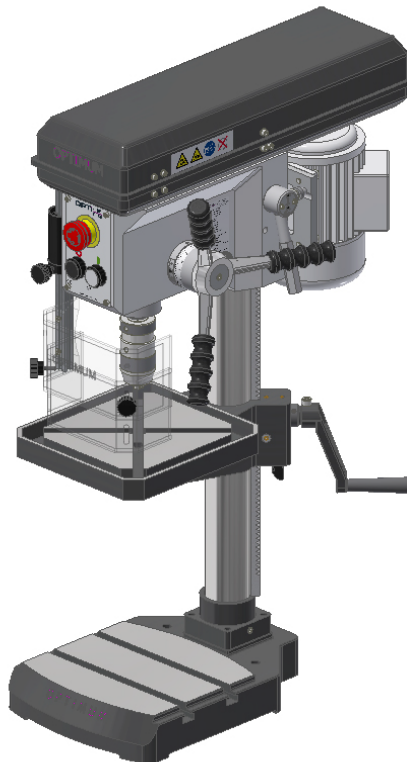




Table of contents

1	Safety	
1.1	Type plate	5
1.2	Safety instructions (warning notes)	6
1.2.1	Classification of hazards	6
1.2.2	Other pictograms	6
1.3	Intended use	7
1.4	Reasonably foreseeable misuse	7
1.4.1	Avoiding misuse	8
1.5	Possible dangers caused by the bench drill	8
1.6	Qualification of personnel	9
1.6.1	Target group	9
1.6.2	Authorized persons	10
1.7	User positions	10
1.8	Safety measures during operation	11
1.9	Safety devices	11
1.10	Safety check	11
1.11	Emergency-stop switch	12
1.12	Drilling table	13
1.13	Separating protective devices	13
1.13.1	Protective cover of the V-belts	13
1.13.2	Drill chuck guard	13
1.14	Personal protective equipment	14
1.15	Safety during operation	14
1.16	Safety during maintenance	14
1.16.1	Disconnecting and securing the bench drill	15
1.16.2	Using lifting equipment	15
1.16.3	Mechanical maintenance	15
1.17	Accident report	15
1.18	Electronics	15
2	Technical specification	
2.1	Electrical connection	16
2.2	Drilling capacity	16
2.3	Spindle seat	16
2.4	Drilling table	16
2.5	Required space	16
2.6	Speeds	16
2.7	Environmental conditions	17
2.8	Operating material	17
2.9	Emissions	17
2.10	Dimensions	18
3	Delivery, interdepartmental transport, assembly and commissioning	
3.1	Notes on transport, installation, commissioning	19
3.1.1	General risks during internal transport	19
3.2	Scope of delivery	20
3.3	Set-up and assembly	20
3.3.1	Installation site requirements	20
3.3.2	Assembly of the drilling machine	20
3.4	Installation	20
3.4.1	Fixing	21
3.4.2	Installation drawings	21
3.4.3	First commissioning	22
3.4.4	Electrical connection	22
3.4.5	Warming up the machine	22
4	Operation	
4.1	Safety	23
4.2	Control and indicating elements	23
4.2.1	Control panel	24
4.3	Switching on the machine	24



4.4	Switching off the machine	24
4.5	Speed variation	25
4.6	Drill depth stop	25
4.6.1	Table height adjustment	26
4.7	Disassembly, assembly of drill chucks and drill bits	26
4.7.1	Fitting the drill chuck	26
4.7.2	Function of quick action drill chuck	27
4.7.3	Unfitting the drill chuck	27
4.8	Cooling	28
4.9	Before starting work	28
4.10	During work	28
5	Determining the cutting speed and the speed	
5.1	Table cutting speeds / infeed	30
5.2	Speed table	30
5.3	Examples to calculatory determine the required speed for your drilling machine	32
6	Maintenance	
6.1	Safety	33
6.1.1	Preparation	33
6.1.2	Restarting	33
6.2	Inspection and maintenance	34
6.3	Repair	38
6.3.1	Customer service technician	38
7	Ersatzteile - Spare parts	
7.1	Ersatzteilbestellung - Ordering spare parts	39
7.2	Hotline Ersatzteile - Spare parts Hotline	39
7.3	Service Hotline	39
7.4	Bohrkopf - Drilling head	40
7.5	Keilriemenscheiben - Pulleys	40
7.6	Säule und Bohrtisch - Column and drilling table	41
7.7	Säule und Bohrtisch - Column and drilling table - ab / from 2019	42
7.7.1	Ersatzteilliste - Parts list	43
7.8	Maschinenschilder - Machine labels	47
7.9	Schaltplan - Wiring diagram	48
7.9.1	Ersatzteilliste elektrische Komponenten - Parts list electrical components	49
8	Malfunctions	
9	Appendix	
9.1	Copyright	52
9.2	Terminology/Glossary	52
9.3	Change information operating manual	52
9.4	Liability claims/warranty	53
9.5	Storage	54
9.6	Advice for disposal / Options of reuse:	54
9.6.1	Decommissioning	55
9.6.2	Disposal of new device packaging	55
9.6.3	Disposal of the old device	55
9.6.4	Disposal of electrical and electronic components	55
9.6.5	Disposal of lubricants and coolants	56
9.7	Disposal via municipal collection facilities	56
9.8	Product follow-up	56



Preface

Dear customer,

Thank you very much for purchasing a product made by OPTIMUM.

OPTIMUM metal working machines offer a maximum of quality, technically optimum solutions and convince by an outstanding price performance ratio. Continuous enhancements and product innovations guarantee state-of-the-art products and safety at any time.

Before commissioning the machine please thoroughly read these operating instructions and get familiar with the machine. Please also make sure that all persons operating the machine have read and understood the operating instructions beforehand.

Keep these operating instructions in a safe place nearby the machine.

Information

The operating instructions include indications for safety-relevant and proper installation, operation and maintenance of the machine. The continuous observance of all notes included in this manual guarantee the safety of persons and of the machine.

The manual determines the intended use of the machine and includes all necessary information for its economic operation as well as its long service life.

In the paragraph "Maintenance" all maintenance works and functional tests are described which the operator must perform in regular intervals.

The illustration and information included in the present manual can possibly deviate from the current state of construction of your machine. Being the manufacturer we are continuously seeking for improvements and renewal of the products. Therefore, changes might be performed without prior notice. The illustrations of the machine may be different from the illustrations in these instructions with regard to a few details. However, this does not have any influence on the operability of the machine.

Therefore, no claims may be derived from the indications and descriptions. Changes and errors are reserved !

Your suggestion with regard to these operating instructions are an important contribution to optimising our work which we offer to our customers. For any questions or suggestions for improvement, please do not hesitate to contact our service department.

If you have any further questions after reading these operating instructions and you are not able to solve your problem with a help of these operating instructions, please contact your specialised dealer or directly the company OPTIMUM.

Optimum Maschinen Germany GmbH

Dr. Robert-Pfleger-Str. 26

D-96103 Hallstadt

Fax (+49)0951 / 96555 - 888

Email: info@optimum-maschinen.de

Internet: www.optimum-machines.com



1 Safety

Glossary of symbols

	provides further instructions
	calls on you to act
	listings

This part of the operating instructions

- explains the meaning and use of the warning notes included in these operating instructions,
- defines the intended use of the drilling machine,
- points out the dangers that might arise for you or others if these instructions are not observed,
- informs you about how to avoid dangers.

In addition to these operation instructions, please observe

- the applicable laws and regulations,
- the statutory provisions for accident prevention,
- the prohibition, warning and mandatory signs as well as the warning notes on the drilling machine.

Always keep this documentation close to the drilling machine.

INFORMATION

If you are unable to rectify an issue using these operating instructions, please contact us for advice:

Optimum Maschinen Germany GmbH
Dr. Robert-Pfleger-Str. 26

D-96103 Hallstadt

email: info@optimum-maschinen.de



1.1 Type plate

Optimum Maschinen
Germany GmbH
Dr. Robert-Pfleger-Str. 26
D-96103 Hallstadt

Tischbohrmaschine
 Bench drilling machine
 Taladro de sobremesa
 Perceuse modèle établi
 Trapani da banco
 Stolní vrtačka
 Table boremaskine
 Penkkiporakone
 ΔΡΑΠΑΝΟ ΠΑΓΚΟΥ
 Asztali fúrógép
 Boormachine tafelmodel
 Wiertarki
 Engenho de Furar de Bancada
 Masina de gaurit
 Bänkbohrmaskin
 Namizni vrtni stroj
 Sütunlu Matkap

B 16 H

NO.	302 0217
	550 W 400 V ~50 Hz
	65 kg
	3500 U/min
SN	J
Year	20

B16H_GB_1.fm

1.2 Safety instructions (warning notes)

1.2.1 Classification of hazards

We classify the safety warnings into different categories. The table below gives an overview of the classification of symbols (ideogram) and the warning signs for each specific danger and its (possible) consequences.

Symbol	Alarm expression	Definition / consequence
	DANGER!	Impending danger that will cause serious injury or death to people.
	WARNING!	A danger that can cause serious injury or death.
	CAUTION!	A danger or unsafe procedure that can cause personal injury or damage to property.
	ATTENTION!	Situation that could cause damage to the drilling machine and product, as well as other types of damage. No risk of injury to persons.
	Information	Practical tips and other important or useful information and notes. No dangerous or harmful consequences for people or objects.

In case of specific dangers, we replace the pictogram with



1.2.2 Other pictograms





Switching on forbidden!



Use ear protection!



Read the operating instructions before commissioning!



Pull out the mains plug!



Wear protective glasses!



Wear protective gloves!



Wear safety shoes!



Wear a protective suit!

1.3 Intended use

WARNING!

In the event of improper use, the bench drill

- will endanger personnel,
 - will endanger the machine and other material property of the operating company,
- the correct function of the bench drill may be affected.



The bench drill is designed and manufactured to be used in a non-explosive environment. The bench drill is designed and manufactured for holes in cold metals or other non flammable materials or that not constitute a health hazard using a rotating filing-stripping tool that has a number of grooves for collecting the filings.

If the bench drill is used in any way other than described above, modified without authorization of Optimum Maschinen Germany GmbH, then the geared drill is being used improperly.

We will not be held liable for any damages resulting from any operation which is not in accordance with the intended use.

We expressly point out that the guarantee will expire, if any constructive, technical or procedural changes are not performed by the company Optimum Maschinen Germany GmbH.

It is also part of the intended use that you

- observe the limits of the bench drill,
- observe the operating instructions,
- and comply with the inspection and maintenance instructions.

 Technical specification on page 16

WARNING!

Extremely severe injuries.

It is forbidden to make any modifications or alternations to the operating parameters values of the bench drill. They could pose an accident hazard to persons and cause damage to the bench drill.



ATTENTION!

If the bench drill is not used as intended or if the safety directives or the operating instructions are ignored the liability of the manufacturer for any damages to persons or objects resulting hereof is excluded and the claim under guarantee is becoming null and avoid!



1.4 Reasonably foreseeable misuse

Any use other than that specified under "Intended use" or any use beyond that described will be deemed non-intended use and is not permissible.



Any other use has to be discussed with the manufacturer.

It is only permissible to process metal, cold and non-inflammable materials with the bench drill.

In order to avoid misuse, it is necessary to read and understand the operating instructions before first commissioning.

Operators must be qualified.

1.4.1 Avoiding misuse

- Use of suitable cutting tools.
- Adapting the speed setting and feed to the material and workpiece.
- Clamp workpieces firmly and free of vibration.

ATTENTION!

The workpiece is always to be fixed by a machine vice, jaw chuck or by another appropriate clamping tool such as for the clamping claws.



WARNING!

Risk of injury caused by flying workpieces.

Clamp the workpiece in the machine vice. Make sure that the workpiece is firmly clamped in the machine vice and that the machine vice is firmly clamped onto the machine table.



- Use cooling and lubricating agents to increase the durability of the tool and to improve the surface quality.
- Clamp the cutting tools and workpieces on clean clamping surfaces.
- Sufficiently lubricate the machine.
- Set the bearing clearance and guides correctly.

Recommendations:

- Insert the drill in a way that it is exactly positioned between the three clamping jaws of the quick action chuck.

When drilling, make sure that

- the suitable speed is set depending on the diameter of the drill,
- the pressure must only be such that the drill can cut without load,
- if there is too much pressure, the drill will wear quickly and may even break or jam in the borehole. If the drill jams, immediately stop the main motor by pressing the emergency stop button,
- use commercial cooling/lubricating agents for hard materials, e.g. steel and
- generally always back the spindle out of the workpiece while it is still turning.

1.5 Possible dangers caused by the bench drill

The bench drill is state-of-the-art.

Nevertheless, there is a residual risk, as the bench drill operates with

- high speeds,
- rotating parts,
- electrical voltage and currents.

We have used design and safety engineering to minimize the health risk to personnel resulting from these hazards.

If the bench drill is used and maintained by personnel who are not duly qualified, there may be a risk resulting from incorrect or unsuitable maintenance of the bench drill.



INFORMATION

Everyone involved in the assembly, commissioning, operation and maintenance must

- be duly qualified,
- and strictly follow these operating instructions.

In the event of improper use

- there may be a risk to personnel,
- there may be a risk to the machine and other material values,
- the correct function of the bench drill may be affected.

Always disconnect the bench drill if cleaning or maintenance work is being carried out, or is no longer in use.



WARNING!

The bench drill may only be used with fully functional safety devices.

Disconnect the bench drill immediately, whenever you detect a failure in the safety devices or when they are not fitted!

All additional devices installed by the operator must be equipped with the stipulated safety devices.

This is your responsibility as the operator!

 **Safety devices on page 11**



1.6 Qualification of personnel

1.6.1 Target group

This manual is addressed to

- the operating companies,
- the operators,
- the maintenance personnel.

Consequently, the warning notes refer both to the use of the bench drill and to its maintenance.

Determine clearly and explicitly who will be responsible for the different activities on the machine (operation, maintenance and repair).

Unclear responsibilities constitute a safety risk!

Always disconnect plug of the bench drill from the electrical power supply. This will prevent it from being used by unauthorized persons.

The qualifications of the personnel for the different tasks are mentioned below:



Operator

The operator is instructed by the operating company about the assigned tasks and possible risks in case of improper behaviour. The operator may only carry out tasks that exceed normal operation if this is stated in these instructions and the operating company has explicitly entrusted him with the task.

Qualified electrician

With professional training, knowledge and experience as well as knowledge of respective standards and regulations, qualified electricians are able to perform work on the electrical system and recognise and avoid any possible dangers.

Qualified electricians have been specially trained for the working environment, in which they are working and know the relevant standards and regulations.



Qualified personnel

Due to their professional training, knowledge and experience as well as knowledge of relevant regulations, qualified personnel are able to perform the assigned tasks and to independently recognise and avoid any possible dangers.

Instructed person

Instructed persons were instructed by the operating company regarding the assigned tasks and any possible risks of improper behaviour.

1.6.2 Authorized persons

WARNING!

Inappropriate operation and maintenance of the bench drill constitutes a danger for the personnel, objects and the environment.



Only authorized personnel may operate the bench drill!

Authorized operating and maintenance personnel are specialists instructed and trained by the operator and the manufacturer.

The operating company must

- train the personnel,
- instruct the personnel in regular intervals (at least once a year) on
 - all safety regulations relevant to the machine,
 - its operation and
 - generally accepted engineering standards.
- check the personnel's knowledge level,
- document the training/instruction,
- have attendance at the training/instruction confirmed by signature and
- check whether the personnel is working in a safety and risk-conscious manner and following the operating instructions.

Obligations of the operating company

The operator must

- have obtained a training regarding the handling of the radial drilling machine,
- know the function and mode of action,
- before taking the machine in operation
 - have read and understood the operating manual,
 - be familiar with all safety devices and instructions.

Obligations of the operator

Additional requirements apply for work on the following machine components:

- Electrical parts or operating agents: shall only be performed by an electrician or under the guidance and supervision of an electrician.
- Before starting work on electrical parts or operating agents, the following actions must be taken in the order given:
 - ➔ disconnect all poles,
 - ➔ secure against restarting,
 - ➔ check that there is no voltage.

Additional requirements regarding the qualification

1.7 User positions

The operator position is in front of the bench drill.



1.8 Safety measures during operation

CAUTION!

Danger due to inhaling dust and mist that is hazardous to health.

Dependent on the material which need to be processed and the used auxiliaries dusts and mist may be caused which might impair you health.

Ensure that the harmful dust and mist generated are safely sucked off at the point of origin and routed away from the working area or filtered. To do so, use a suitable extraction unit.



CAUTION!

Risk of fire and explosion by using flammable materials or cooling lubricants.

Before processing inflammable materials (e.g. aluminium, magnesium) or using inflammable auxiliary materials (e.g. spirit) it is necessary to take additional preventive measures in order to safely avoid health risks.



1.9 Safety devices

The bench drill must only be operated with fully functional safety devices.

Stop the bench drill immediately if there is a failure on the safety device or becomes ineffective.

It is your responsibility!

If a safety device has been activated or has failed, the bench drill must only be used if you

- ☐ the cause of the fault has been eliminated,
- ☐ you have verified that there is no danger to personnel or objects.

WARNING!

If you bypass, remove or override a safety device in any other way, you are endangering yourself and other persons working with the bench drill. The possible consequences are:

- ☐ injuries due to components or workpieces flying off at high speed,
- ☐ contact with rotating parts,
- ☐ fatal electrocution,

The bench drill includes the following safety devices:

- ☐ an emergency stop push button,
- ☐ a drilling table with T-slots to fix the workpiece or a vice,
- ☐ a protective cover for the pulleys with positioning switch,
- ☐ a drill chuck guard, in order to prevent interference with the rotating tool.



WARNING!

Although the isolating safety devices provided and delivered with the machine are designed to reduce the risks of workpieces being ejected or parts of tools or workpieces breaking off, they cannot eliminate these risks completely. Always work carefully and observe the limits of the machining process.



1.10 Safety check

Check the bench drill before each start-up or at least once per shift. Inform the person responsible immediately of any damage, defects or changes in the operating function.

Check all safety devices

- ☐ at the beginning of each shift (with the machine stopped),
- ☐ once a week (with the machine in operation) and
- ☐ after all maintenance and repair work.



Check that prohibition, warning and information signs and the labels on the bench drill.

- are legible (clean them, if necessary)
- are complete (replace if necessary).

INFORMATION

Organise the checks according to the following table;



General check		
Equipment	check	OK
Guards	Mounted, firmly bolted and not damaged	
Signs, Markers	Installed and legible	
Date:	Checked by (signature):	

Functional check		
Equipment	check	OK
Emergency-stop switch	After actuating the emergency-stop push button the bench drill must be switched off.	
Limit switch protective cover V-belt	The bench drill must not be switched on, if the protective cover of the V-belts is opened. An opening of the protective cover during machine operating turns off the machine.	
Drill chuck guard	The bench drill can only be switched on if the drill chuck guard is closed. The engine must switch off when the drill chuck guard is opened during operation.	
Date:	Checked by (signature):	

1.11 Emergency-stop switch

ATTENTION!

The drilling spindle keeps turning for a short time even after actuating the emergency stop push button depending on the pre-set speed.



Abb. 1-1: Emergency-stop



1.12 Drilling table

Seats for T-slots are attached to the clamping table.

WARNING!

Risk of injury due to workpieces flying off at high speed. Securely fix the workpiece on the drilling table.

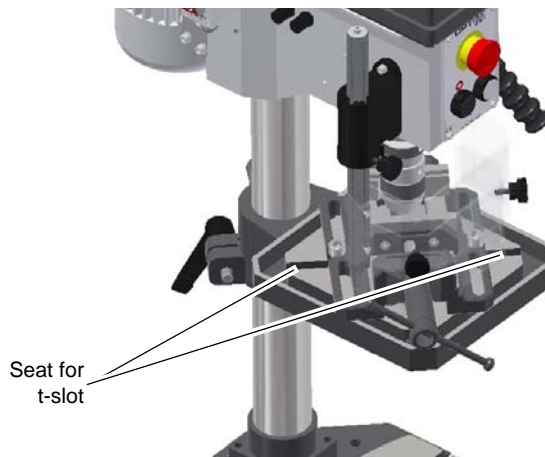


Abb. 1-2: Drilling table

1.13 Separating protective devices

1.13.1 Protective cover of the V-belts

A protective cover for the belt pulleys is mounted on the drilling head. There is a switch integrated in the protective cover which monitors that the cover is closed.

INFORMATION

The machine cannot be started, if the protective cover is not closed.

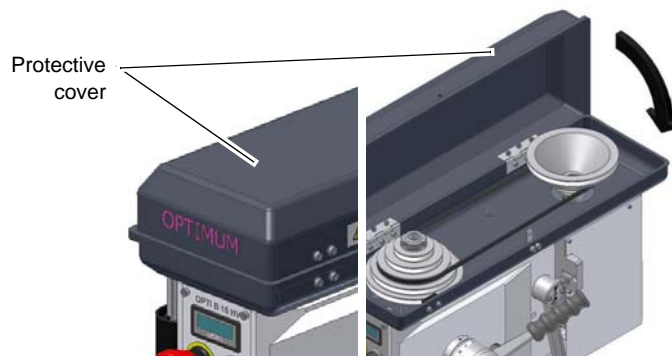


Abb. 1-3: Protective cover

1.13.2 Drill chuck guard

Adjust the guard to the correct height before you start working.

To do so, slacken the clamping screw, set the required height and retighten the clamping screw.

There is a switch integrated in the spindle protection mounting which monitors the closed position.

INFORMATION

The machine cannot be started, if the drill chuck guard is not closed.

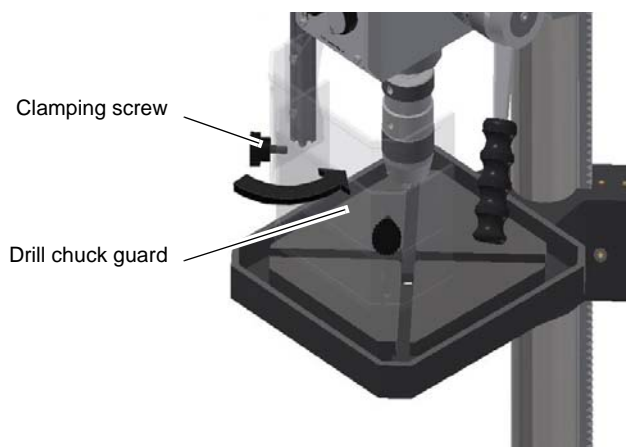


Abb. 1-4: Drill chuck guard



1.14 Personal protective equipment

For some works you need personnel protective equipment as protective equipment. These are

- Safety helmet,
- protective glasses or face guard,
- protective gloves,
- safety shoes with steel toe caps,
- ear protection.

Before starting work make sure that the required personnel protective equipment is available at the work place.

CAUTION!

Soiled personal protection equipment that may be contaminated may cause illness.

Clean your personal protective equipment

- after each use,
- regularly once a week.



Personal protective equipment for special works

Protect your face and your eyes: Wear a safety helmet with facial protection when performing work where your face and eyes are exposed to hazards.



Wear protective gloves when handling pieces with sharp edges.



Wear safety shoes when you assemble, disassemble or transport heavy components.



1.15 Safety during operation

We specifically point out the dangers in the description of work with and on the bench drill.

WARNING!

Before switching on the bench drill make sure that there are

- no dangers generated for persons,
- no objects are damaged.



Avoid any unsafe work methods:

- Make sure that your operation does not create a safety hazard.
- The rules specified in these operating instructions must be observed during assembly, operation, maintenance and repair.
- Do not work on the bench drill if your concentration is reduced, for example, because you are taking medication.
- Observe the accident prevention regulations issued by your Employers Liability Insurance Association or other supervisory authorities applicable to your company.
- Inform the supervisor about all hazards or faults.
- Stay on the bench drill until the machine completely stopped moving.
- Use the specified personal protective equipment. Ensure you wear close-fitting clothing and, if necessary, a hairnet.
- Do not use protective gloves when drilling.

1.16 Safety during maintenance

Inform the operators in good time of any maintenance and repair works.



Report all safety relevant changes and performance details of the bench drill or their operational behaviour. Any changes must be documented, the operating instructions updated and machine operators instructed accordingly.

1.16.1 Disconnecting and securing the bench drill

The bench drill is equipped with a master switch.

When the master switch is switched off, the power supply to the machine is completely interrupted.

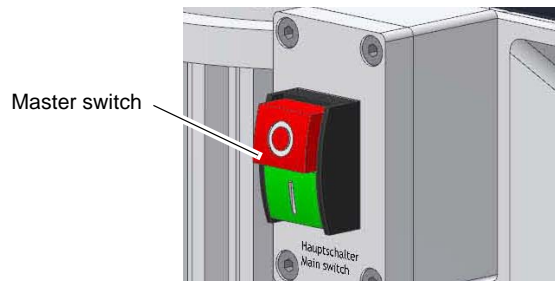


Abb. 1-5: Main switch B16H

Excepted are only the positions which are marked with the adjoining pictogram.

Disconnect the power plug to completely disconnect the drill from the power supply.



1.16.2 Using lifting equipment

WARNING!

The use of unstable lifting and load suspension equipment that might break under load can cause severe injuries or even death.

Check that the lifting and load suspension gear

- they have sufficient load carrying,
- and that it is in perfect condition.

Observe the accident prevention regulations issued by your Employers Liability Insurance Association or other supervisory authorities applicable to your company.

Fasten the loads carefully. Never walk under suspended loads!



1.16.3 Mechanical maintenance

Reinstall all protection and safety devices after any maintenance work once the work has been completed. This includes:

- covers,
- safety instructions and warning signs,
- grounding cables.

Check if they are working properly!

1.17 Accident report

Inform your supervisors and Optimum Maschinen Germany GmbH immediately in the event of accidents, possible sources of danger and any actions which almost led to an accident (near misses).

There are many possible causes for "near misses".

The sooner they are notified, the quicker the causes can be eliminated.

1.18 Electronics

Have the machine and/or the electric equipment checked regularly. Immediately eliminate all defects such as loose connections, defective wires, etc.

Define and document the inspection deadlines for the machine in accordance with § 3 of the Factory Safety Act and perform an operational risk analysis in accordance with § 6 of the Work Safety Act.



2 Technical specification

The following information represents the dimensions and indications of weight and the manufacturer's approved machine data.

2.1 Electrical connection	
Connection	400V ~50 Hz 0.55 kW

2.2 Drilling capacity	
Drilling capacity in steel [mm]	13
Drilling capacity in cast [mm]	16
Continuous drilling capacity in steel [mm]	11
Throat [mm]	130
Spindle sleeve stroke [mm]	65

2.3 Spindle seat	
Spindle seat	MT2

2.4 Drilling table	
Table size [mm] Length x Width of the working surface	230 x 245
T-slot size [mm]	12
Maximum distance [mm] spindle - table	370
Maximum distance [mm] spindle - stand	495
Working surface stand [mm] Length x Width of the working surface	200 x 240

2.5 Required space	
Height [mm]	1500
Depth [mm]	1200
Width [mm]	1000
Weight [kg]	54

2.6 Speeds	
Spindle speeds [rpm]	450 - 3500
Number of stages	5



2.7 Environmental conditions	
Temperature	535 °C
Relative humidity	25 - 80 %

2.8 Operating material	
toothed rod	commercial lubricating grease
Column, bare steel parts	acid-free oil, e.g. machine oil, motor oil

2.9 Emissions

The generation of noise emitted by the bench drill is lower than 76 dB(A).

If the bench drill is installed in an area where various machines are in operation, the noise exposure (immission) on the operator of the milling machine at the working place may exceed 80 dB(A).

INFORMATION

This numerical value was measured on a new machine under the operating conditions specified by the manufacturer. The noise behaviour of the machine might change depending on the age and wear of the machine.

Furthermore, the noise emission also depends on production engineering factors, e.g. speed, material and clamping conditions.

INFORMATION

The specified numerical value represents the emission level and does not necessarily a safe working level.

Though there is a dependency between the degree of the noise emission and the degree of the noise disturbance it is not possible to use it reliably to determine if further precaution measures are required or not.

The following factors influence the actual degree of the noise exposure of the operator:

- Characteristics of the working area, e.g. size of damping behaviour,
- other noise sources, e.g. the number of machines,
- other processes taking place in proximity and the period of time, during which the operator is exposed to the noise.


Furthermore, it is possible that the admissible exposure level might be different from country to country due to national regulations.

This information about the noise emission should, however, allow the operator of the machine to more easily evaluate the hazards and risks.

CAUTION!

Depending on the overall noise exposure and the basic threshold values, machine operators must wear appropriate hearing protection.

We generally recommend the use of noise and ear protection.



2.10 Dimensions

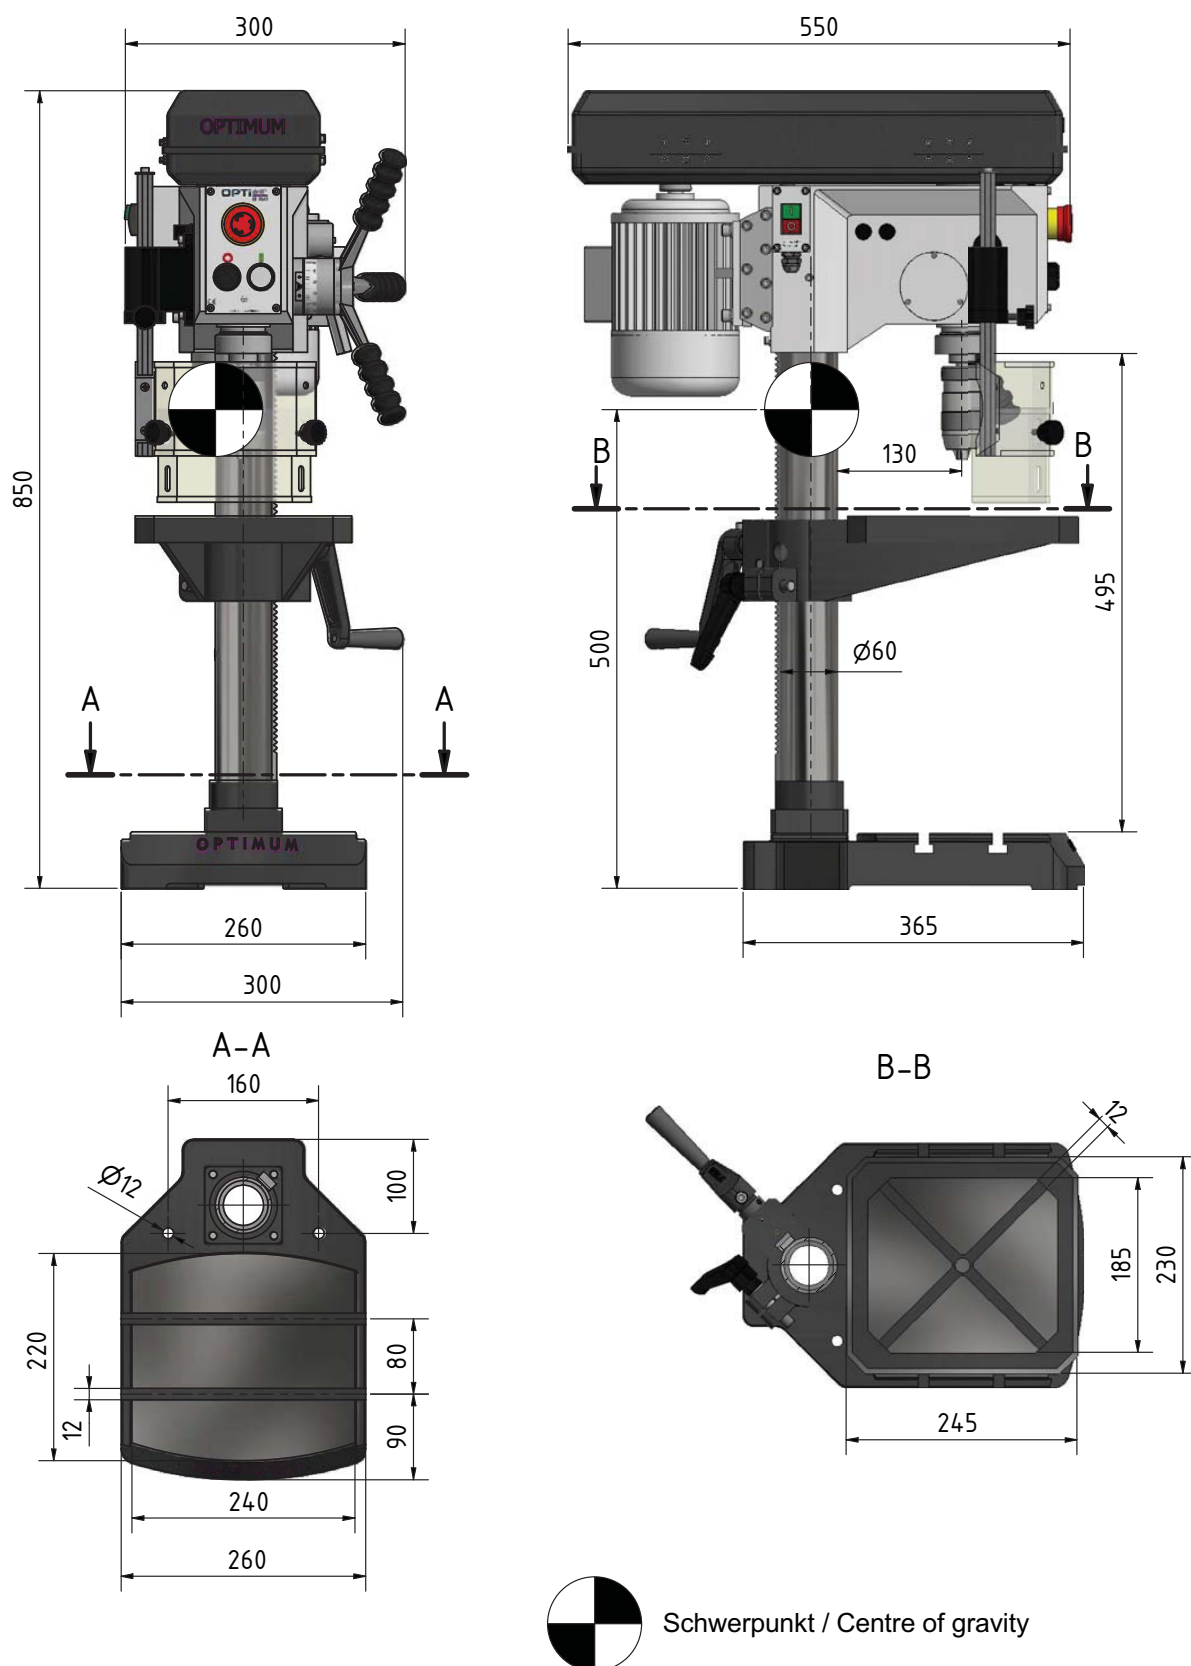


Abb.2-1:



3 Delivery, interdepartmental transport, assembly and commissioning

3.1 Notes on transport, installation, commissioning

Improper transport, installation and commissioning is liable to accidents and can cause damage or malfunctions to the machine for which we do not assume any liability or guarantee.

Transport the scope of delivery secured against shifting or tilting with a sufficiently dimensioned industrial truck or a crane to the installation site.

WARNING!

Severe or fatal injuries may occur if parts of the machine tumble or fall down from the forklift truck or from the transport vehicle. Follow the instructions and information on the transport box.



Note the total weight of the machine. The weight of the machine is indicated in the "Technical data" of the machine. When the machine is unpacked, the weight of the machine can also be read on the rating plate.

Only use transport devices and load suspension gear that can hold the total weight of the machine.

WARNING!

The use of unstable lifting and load suspension equipment that might break under load can cause severe injuries or even death. Check that the lifting and load suspension gear has sufficient load-bearing capacity and that it is in perfect condition.



Observe the accident prevention regulations issued by your Employers Liability Insurance Association or other competent supervisory authority, responsible for your company. Fasten the loads properly.

3.1.1 General risks during internal transport

WARNING: TILTING DANGER!

The machine may be lifted unsecured by a maximum of 2 cm.

Employees must be outside the danger zone, i.e. the reach of the load.

Warn employees and advise them of the hazard.



Machines may only be transported by authorized and qualified persons. Act responsibly during transport and always consider the consequences. Refrain from daring and risky actions.

Gradients and descents (e.g. driveways, ramps and the like) are particularly dangerous. If such passages are unavoidable, special caution is required.

Before starting the transport check the transport route for possible danger points, unevenness and faults.

Danger points, unevenness and disturbance points must be inspected before transport. The removal of danger spots, disturbances and unevenness at the time of transport by other employees leads to considerable dangers.

Careful planning of interdepartmental transport is therefore essential.



3.2 Scope of delivery

When the machine is delivered, please check immediately that it has not been damaged during transport. Compare the scope of delivery with the attached packing list.

3.3 Set-up and assembly

3.3.1 Installation site requirements

Organise the working area around the bench drill according to the local safety regulations.

INFORMATION

In order to attain good functionality and a high processing accuracy as well as a long service life of the machine, the place of installation should fulfil certain criteria.



Please observe the following points:

- The device must only be installed and operated in a dry and well-ventilated place.
- Avoid places close to machines which cause chips or dust.
- The installation site must be vibration-free, i.e. located away from presses, planing machines, etc.
- The substructure must be suitable for the bench drill. Pay attention also to the load-bearing capacity and evenness of the floor.
- The substructure must be prepared in such a way as to ensure that, if any lubricant is used, it cannot penetrate the floor.
- Any parts sticking out such as stops, handles, etc. have to be secured by measures taken by the customer if necessary in order to avoid endangering persons.
- Provide sufficient space for the personnel preparing and operating the machine and transporting the material.
- Also make sure the machine is accessible for setting and maintenance works.
- Provide for sufficient backlight (Minimum value: 500 Lux, measured at the tool tip). In the event of a lower level of lighting, additional illumination must be provided, e.g. by means of a separate workplace light.

INFORMATION

The power plug of the bench drill must be readily accessible.



3.3.2 Assembly of the drilling machine

WARNING!

Danger of crushing when assembling and installing the machine components.



INFORMATION

The drilling machine is delivered premounted.

Only put up the drilling machine at the installation site and pin up the drill chuck on the seat cone.



3.4 Installation

- ➔ Check the horizontal orientation of the base of the bench drill with a spirit level.
- ➔ Check that the foundation has sufficient load-bearing capacity and rigidity.
- ➔ Place the bench drill on the provided foundation.



- Fix the bench drill in the provided through-holes on the machine foot. ➡ „Fixing“ auf Seite 21

WARNING!

The condition of the foundation and the fixing type of the machine foot to the foundation must be in a way that it can bear the loads of the bench drill. The foundation must be level. Check that the bench drill foundation is horizontal by using a spirit level.



3.4.1 Fixing

In order to ensure the required stability of the bench drill, it is recommended that the machine be firmly connected to the subsurface at its base.

- Fix the foot of the bench drill to the foundation with the provided through-holes.

The through-bore are marked with arrows on the machine base.

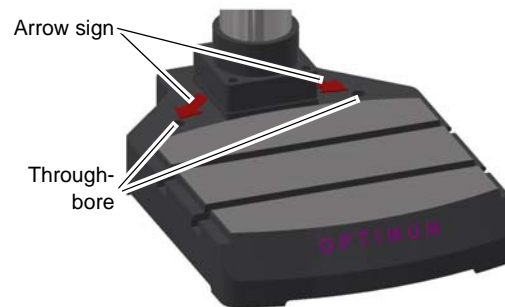


Abb.3-1: Marking of fixing points on bench drills

ATTENTION!

Tighten the fixing screws of the bench drill only as much that it is safely fixed and cannot break away or tilt over.

If the fixing screws are too tight in particular in connection with an uneven substructure it may result in a broken stand of the machine.



3.4.2 Installation drawings

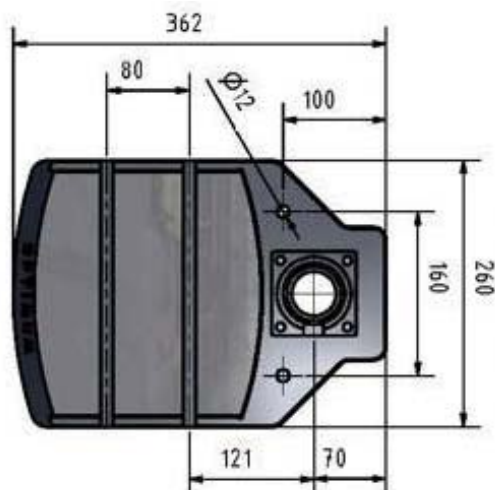


Abb.3-2: B16H



3.4.3 First commissioning

WARNING!

First commissioning may only take place after proper installation.

There is a danger to persons and equipment, if the first commissioning of the drilling machine is carried out by inexperienced personnel. We do not accept any liability for damages caused by incorrectly performed commissioning.

Only use tool holders in the intended admissible speed range.

☞ „Qualification of personnel“ auf Seite 9.

Thoroughly read the operating instructions before commissioning the bench drill. They allow a safe commissioning of the machine. Follow the safety instructions of the operating manual.



3.4.4 Electrical connection

The machine is installed and ready to operate. Please verify if the type of current, voltage and protection fuse correspond to the values specified. A protective earth ground wire connection must be available. Mains fuse 10A to 16A

CAUTION !

Arrange the machine's connection cable in such a way that it will not cause a tripping hazard.



3.4.5 Warming up the machine

ATTENTION!

If the bench drill and in particular the drilling spindle is immediately operated at maximum load when it is cold it may result in damages.

If the machine is cold, e.g. directly after having transported the machine, it should be warmed up at a spindle speed of only 500 1/min for the first 30 minutes.

Perform a test run on the machine that is mounted, set up and connected to the power supply. This should also serve to run in the mechanical components of the machine before the first machining.






4 Operation

4.1 Safety


Commission the machine only under the following conditions:

- The machine is in proper working order.
- The machine is used as prescribed.
- The operating instructions are observed.
- All safety devices are installed and activated.

All failures should be eliminated immediately. Stop the machine immediately in the event of any anomaly in operation and make sure it cannot be started up accidentally or without authorization.

Notify the person responsible immediately of any modification.  Safety during operation on page 14

4.2 Control and indicating elements

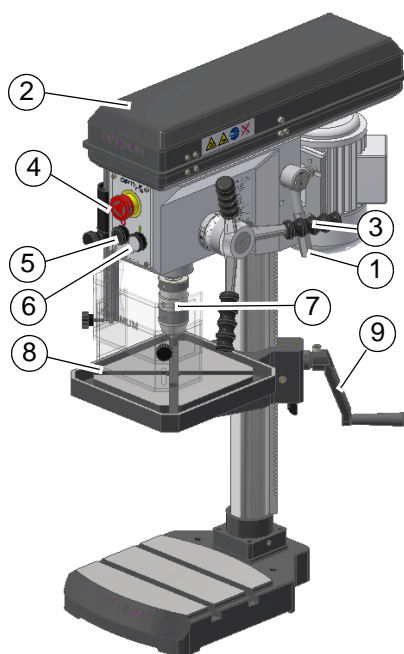

Pos.	Designation	Pos.	Designation
1	Lever for belt tension	2	Belt drive with housing
3	Lever for spindle sleeve feed	4	Emergency-stop
5	Off	6	On
7	Drill chuck	8	Drilling table
9	Table height adjustment		

4.2.1 Control panel

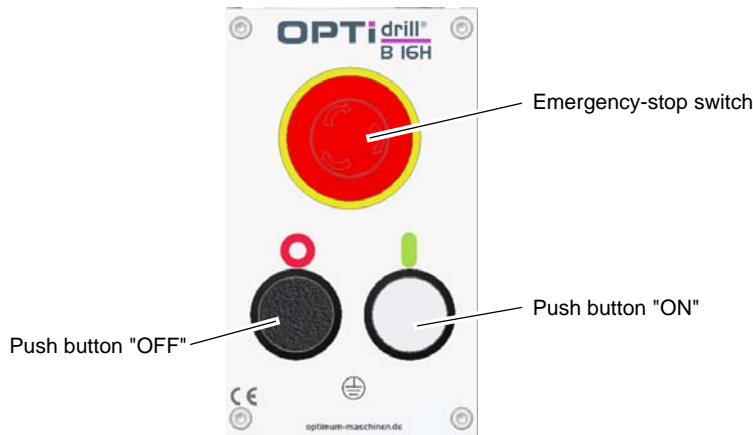


Abb.4-1:

Push button ON

The push button "ON" switches on the rotation of the drilling spindle in preselected operating mode.



Push button OFF


The "push button OFF" switches the rotation of the drilling spindle off.



Master switch

Interrupts or connects the power supply.

☞ Disconnecting and securing the bench drill on page 15.




4.3 Switching on the machine

➔ Switch on the master switch.

➔ Select the speed level.

☞ Speed variation on page 25

➔ Actuate the push button "ON".




4.4 Switching off the machine

CAUTION!


Only press the emergency stop button in a genuine emergency. You should not use the emergency stop button to stop the machine during normal operation.



➔ Actuate the push button "OFF".



➔ For a long-term standstill of the machine switch it off at the master switch.



B16H_GB_4.fm



4.5 Speed variation

- Switch off the machine by using the main switch.
- Open the protective cover.
- Loosen the lever of the V-belt tensioning.
- Position the V-belt respectively on the required transmission stage.

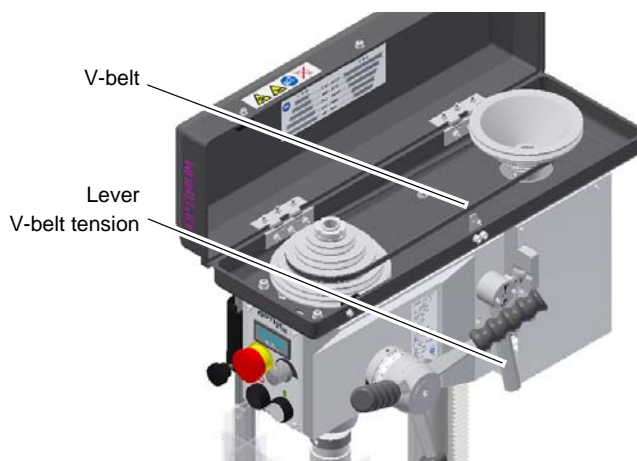


Abb.4-2: Lever V-belt tensioning

- Tighten the clamping lever again and thus tighten the belt drive.
- Close the protective cover.

4.6 Drill depth stop

Use the drilling depth stop when drilling several holes of the same depth.

- Loosen the locking screw and turn the graduated collar until the required drilling depth matches with the indicator.
- Re-tighten the locking screw.

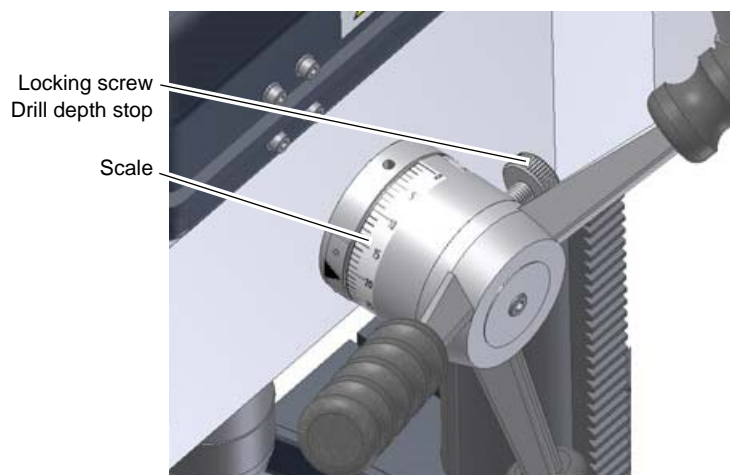


Abb.4-3: Drill depth stop

4.6.1 Table height adjustment

- ➔ Release the clamping lever on the drilling table.
- ➔ Use the hand crank to move the drilling table to the desired height.
- ➔ Retighten the clamping lever firmly.

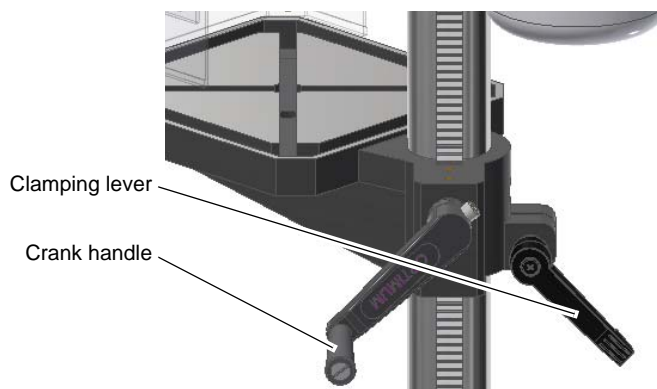


Abb. 4-4: Table height adjustment

4.7 Disassembly, assembly of drill chucks and drill bits

4.7.1 Fitting the drill chuck

The drill chuck or the tool is secured in the drill spindle against turning over by means of a form-locking connection (driver).

A frictionally engaged connection keeps and centres the drill chuck or the drill in the drill spindle.

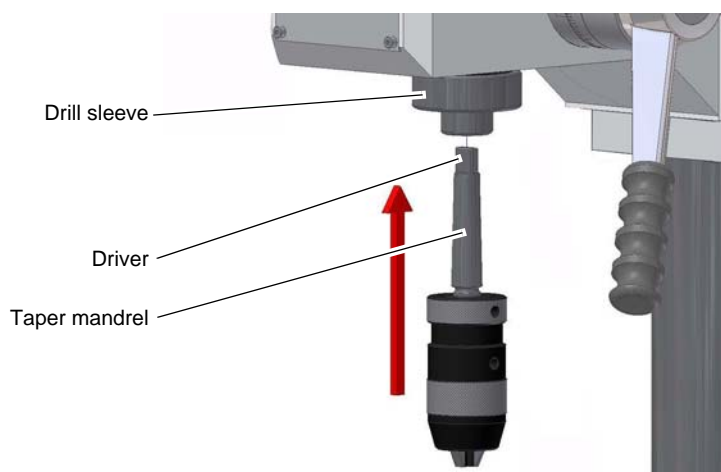


Abb. 4-5: Taper mandrel

- ➔ Check or clean the conical seat in the drill spindle and on the taper mandrel of the tool or of the quick-action drill chuck.
- ➔ Press the taper mandrel into the drill spindle.



4.7.2 Function of quick action drill chuck

The drill chuck consists of two parts (1 and 2)

- Hold the upper part (No.1) of the drill chuck. With the bottom part of the drill chuck (No. 2) it is possible to tighten or loosen the jaws of the quick-action drill chuck.
- Turn the tool (drill) firmly.

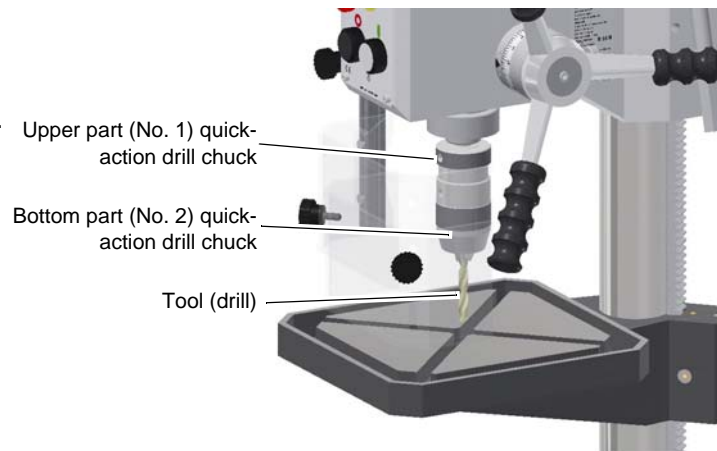


Abb.4-6: Quick-action drill chuck

CAUTION!

Make sure that the clamped tool is firmly and correctly fitted.



4.7.3 Unfitting the drill chuck

The drill chuck and the taper mandrel are loosened from the drill spindle by means of a drill drift.

WARNING!

Only disassemble the drill chuck if the bench drill is disconnected from the electrical supply.

- Switch off the bench drill on the master switch or disconnect the mains plug.
- Move the drill sleeve down.
- Turn the drilling spindle until the openings of the sleeve and of the drilling spindle are superimposed.
- Loosen the taper mandrel of the drill chuck with the help of a drill drift.

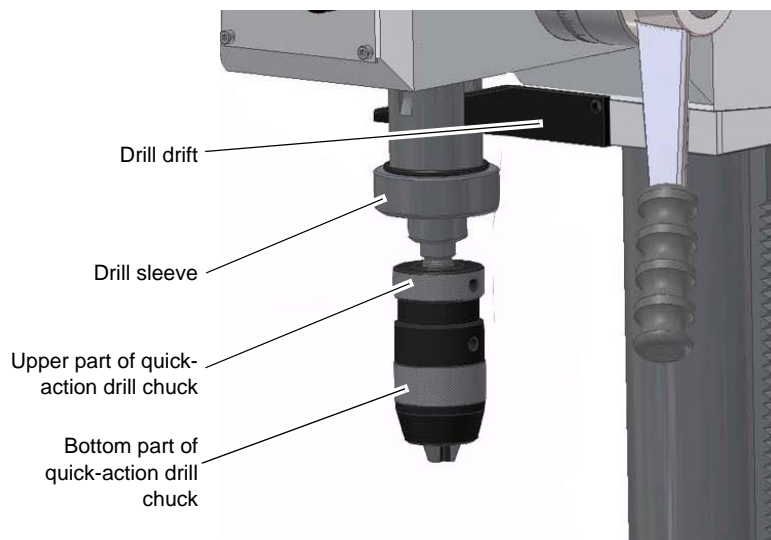


Abb.4-7: Unfitting the drill chuck





4.8 Cooling

The friction generated during rotation can cause the edge of the tool to become very hot.

The tool should be cooled during the drilling process. Cooling the tool with a suitable cooling lubricant ensures better working results and a longer edge life of the tools.

This is best realised by a separate cooling equipment. If there is no cooling equipment included in the delivery volume, you can cool by means of a spray gun or a washing bottle.

CAUTION!

Danger of injury due to brushes getting caught or pulled in.

Use a spray gun or a washing bottle for cooling.



INFORMATION

Use a water-soluble and non-pollutant emulsion as a cooling agent. This can be acquired from authorised distributors.


Make sure that the cooling agent is being collected.

Respect the environment when disposing of lubricants and coolants.

Follow the manufacturer's disposal instructions.



4.9 Before starting work

Before starting work, select the desired speed. It is depending on the used drilling diameter and on the material.  Determining the cutting speed and the speed on page 30

WARNING!

For drilling jobs, it is necessary to clamp the workpiece firmly to prevent the bit catching on the pieces. A machine vice or clamping claws is a suitable clamping device.

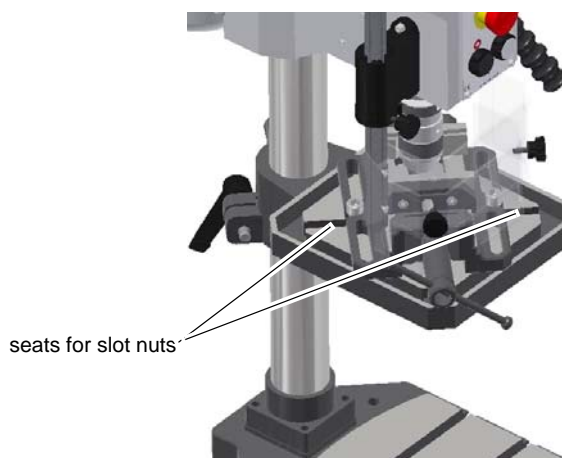


Abb. 4-8: seats for slot nuts

Put a wooden or plastic board beneath the workpiece to avoid drilling through to the work table, vice, etc.

If required, adjust the desired drilling depth by means of the drilling depth stop in order to obtain a uniform drilling depth.

Please make sure to use a suitable dust suction when treating wood since wood dust may be health hazardous. Wear a suitable dust mask when performing works at which dust is generated.

4.10 During work

The spindle sleeve feed is done via the star grip. Make sure that the feed is constant and not too fast.

The spindle sleeve is returned to its initial position by the return spring.

**WARNING!**

Seizing of clothes and / or hair.

- **Make sure to wear well-fitting work during drilling work.**
- **Do not use gloves.**
- **If necessary, use a hairnet.**

**CAUTION!**

Danger of bumps from the levers on the star grip.

Do not release the star grip when repositioning the drilling spindle sleeve.

**CAUTION!**

Danger of crushing. Do not place your hand between the drilling head and the spindle sleeve.

**INFORMATION**

The smaller the bit the more easily it may break.

In the case of deep drilling, remove the bit from time to time to remove filings from the drill. Add a few drops of oil to reduce friction and prolong the service life of the bit.





5 Determining the cutting speed and the speed

5.1 Table cutting speeds / infeed

Material table						
Material to be processed	Recommended cutting speed V_c in m/min	Recommended infeed f in mm/revolution				
		Drill bit diameter d in mm				
		2...3	>3...6	>6...12	>12...25	>25...50
Unalloyed construction steels < 700 N/mm ²	30 - 35	0.05	0.10	0.15	0.25	0.35
Alloyed construction steels > 700 N/mm ²	20 - 25	0.04	0.08	0.10	0.15	0.20
Alloyed steels < 1000 N/mm ²	20 - 25	0.04	0.08	0.10	0.15	0.20
Steels, low stability < 800 N/mm ²	40	0.05	0.10	0.15	0.25	0.35
Steel, high stability > 800 N/mm ²	20	0.04	0.08	0.10	0.15	0.20
non-rust steels > 800 N/mm ²	12	0.03	0.06	0.08	0.12	0.18
Cast iron < 250 N/mm ²	15 - 25	0.10	0.20	0.30	0.40	0.60
Cast iron > 250 N/mm ²	10 - 20	0.05	0.15	0.25	0.35	0.55
CuZn alloy brittle	60 - 100	0.10	0.15	0.30	0.40	0.60
CuZn alloy ductile	35 - 60	0.05	0.10	0.25	0.35	0.55
Aluminum alloy up to 11% Si	30 - 50	0.10	0.20	0.30	0.40	0.60
Thermoplastics	20 - 40	0.05	0.10	0.20	0.30	0.40
Thermosetting materials with organic filling	15 - 35	0.05	0.10	0.20	0.30	0.40
Thermosetting materials with anorganic filling	15 - 25	0.05	0.10	0.20	0.30	0.40

5.2 Speed table

V_c in m/min	4	6	8	10	12	15	18	20	25	30	35	40	50	60	80	100
Drill bit \varnothing in mm	Speed n in rpm															
1,0	1274	1911	2548	3185	3822	4777	5732	6369	7962	9554	1114 6	12739	15924	19108	25478	31847
1,5	849	1274	1699	2123	2548	3185	3822	4246	5308	6369	7431	8493	10616	12739	16985	21231
2,0	637	955	1274	1592	1911	2389	2866	3185	3981	4777	5573	6369	7962	9554	12739	15924
2,5	510	764	1019	1274	1529	1911	2293	2548	3185	3822	4459	5096	6369	7643	10191	12739
3,0	425	637	849	1062	1274	1592	1911	2123	2654	3185	3715	4246	5308	6369	8493	10616
3,5	364	546	728	910	1092	1365	1638	1820	2275	2730	3185	3640	4550	5460	7279	9099
4,0	318	478	637	796	955	1194	1433	1592	1990	2389	2787	3185	3981	4777	6369	7962
V_c in m/min	4	6	8	10	12	15	18	20	25	30	35	40	50	60	80	100

D mm - V_c m/min



Drilling_VC_GB.fm

Drill bit Ø in mm	Speed n in rpm															
	283	425	566	708	849	1062	1274	1415	1769	2123	2477	2831	3539	4246	5662	7077
4,5	283	425	566	708	849	1062	1274	1415	1769	2123	2477	2831	3539	4246	5662	7077
5,0	255	382	510	637	764	955	1146	1274	1592	1911	2229	2548	3185	3822	5096	6369
5,5	232	347	463	579	695	869	1042	1158	1448	1737	2027	2316	2895	3474	4632	5790
6,0	212	318	425	531	637	796	955	1062	1327	1592	1858	2123	2654	3185	4246	5308
6,5	196	294	392	490	588	735	882	980	1225	1470	1715	1960	2450	2940	3920	4900
7,0	182	273	364	455	546	682	819	910	1137	1365	1592	1820	2275	2730	3640	4550
7,5	170	255	340	425	510	637	764	849	1062	1274	1486	1699	2123	2548	3397	4246
8,0	159	239	318	398	478	597	717	796	995	1194	1393	1592	1990	2389	3185	3981
8,5	150	225	300	375	450	562	674	749	937	1124	1311	1499	1873	2248	2997	3747
9,0	142	212	283	354	425	531	637	708	885	1062	1238	1415	1769	2123	2831	3539
9,5	134	201	268	335	402	503	603	670	838	1006	1173	1341	1676	2011	2682	3352
10,0	127	191	255	318	382	478	573	637	796	955	1115	1274	1592	1911	2548	3185
11,0	116	174	232	290	347	434	521	579	724	869	1013	1158	1448	1737	2316	2895
12,0	106	159	212	265	318	398	478	531	663	796	929	1062	1327	1592	2123	2654
13,0	98	147	196	245	294	367	441	490	612	735	857	980	1225	1470	1960	2450
14,0	91	136	182	227	273	341	409	455	569	682	796	910	1137	1365	1820	2275
15,0	85	127	170	212	255	318	382	425	531	637	743	849	1062	1274	1699	2123
16,0	80	119	159	199	239	299	358	398	498	597	697	796	995	1194	1592	1990
17,0	75	112	150	187	225	281	337	375	468	562	656	749	937	1124	1499	1873
18,0	71	106	142	177	212	265	318	354	442	531	619	708	885	1062	1415	1769
19,0	67	101	134	168	201	251	302	335	419	503	587	670	838	1006	1341	1676
20,0	64	96	127	159	191	239	287	318	398	478	557	637	796	955	1274	1592
21,0	61	91	121	152	182	227	273	303	379	455	531	607	758	910	1213	1517
22,0	58	87	116	145	174	217	261	290	362	434	507	579	724	869	1158	1448
23,0	55	83	111	138	166	208	249	277	346	415	485	554	692	831	1108	1385
24,0	53	80	106	133	159	199	239	265	332	398	464	531	663	796	1062	1327
25,0	51	76	102	127	153	191	229	255	318	382	446	510	637	764	1019	1274
26,0	49	73	98	122	147	184	220	245	306	367	429	490	612	735	980	1225
27,0	47	71	94	118	142	177	212	236	295	354	413	472	590	708	944	1180
28,0	45	68	91	114	136	171	205	227	284	341	398	455	569	682	910	1137
29,0	44	66	88	110	132	165	198	220	275	329	384	439	549	659	879	1098
30,0	42	64	85	106	127	159	191	212	265	318	372	425	531	637	849	1062
31,0	41	62	82	103	123	154	185	205	257	308	360	411	514	616	822	1027
32,0	40	60	80	100	119	149	179	199	249	299	348	398	498	597	796	995
33,0	39	58	77	97	116	145	174	193	241	290	338	386	483	579	772	965
34,0	37	56	75	94	112	141	169	187	234	281	328	375	468	562	749	937
35,0	36	55	73	91	109	136	164	182	227	273	318	364	455	546	728	910
36,0	35	53	71	88	106	133	159	177	221	265	310	354	442	531	708	885
37,0	34	52	69	86	103	129	155	172	215	258	301	344	430	516	689	861
38,0	34	50	67	84	101	126	151	168	210	251	293	335	419	503	670	838
Vc in m/min	4	6	8	10	12	15	18	20	25	30	35	40	50	60	80	100



Drill bit Ø in mm	Speed n in rpm															
39,0	33	49	65	82	98	122	147	163	204	245	286	327	408	490	653	817
40,0	32	48	64	80	96	119	143	159	199	239	279	318	398	478	637	796
41,0	31	47	62	78	93	117	140	155	194	233	272	311	388	466	621	777
42,0	30	45	61	76	91	114	136	152	190	227	265	303	379	455	607	758
43,0	30	44	59	74	89	111	133	148	185	222	259	296	370	444	593	741
44,0	29	43	58	72	87	109	130	145	181	217	253	290	362	434	579	724
45,0	28	42	57	71	85	106	127	142	177	212	248	283	354	425	566	708
46,0	28	42	55	69	83	104	125	138	173	208	242	277	346	415	554	692
47,0	27	41	54	68	81	102	122	136	169	203	237	271	339	407	542	678
48,0	27	40	53	66	80	100	119	133	166	199	232	265	332	398	531	663
49,0	26	39	52	65	78	97	117	130	162	195	227	260	325	390	520	650
50,0	25	38	51	64	76	96	115	127	159	191	223	255	318	382	510	637

5.3 Examples to calculatory determine the required speed for your drilling machine

The necessary speed is depending on the diameter of the drill bit, on the material which is being machined as well as on the cutting material of the drill bit.

Material which needs to be drilled: St37

Cutting material (drill bit): HSS spiral bit

Set point of the cutting speed [V_c] according to the table: 40 meters per minute

Diameter [d] of your drill bit: 30 mm = 0,03 m [meters]

Selected infeed [f] according to the table: about 0.35 mm/rev

$$\text{Speed } n = \frac{V_c}{\pi \times d} = \frac{40 \text{ m}}{\text{min} \times 3,14 \times 0,03 \text{ m}} = 425(\text{rpm})$$


Set a speed on your drilling machine which is less than the determined speed.

INFORMATION

In order to facilitate the production of larger drill holes they need to be pre-drilled. This way, you reduce the cutting forces and improve the guiding of the drill bit.

The pre-drilling diameter is depending on the length of the chisel edge. The chisel edge does not cut, but it squeezes the material. The chisel edge is positioned at an angle of 55° to the major cutting edge.

As a general rule of thumb it applies: The pre-drilling diameter is depending on the length of the chisel edge.



Chisel edge length 10% of the drill bit - Ø



Recommended working steps for a drilling diameter of 30 mm

Example:

1st working step: Pre-drilling with Ø 5 mm.

2nd working step: Pre-drilling with Ø 15 mm.

3rd working step: Drilling with Ø 30 mm.



6 Maintenance

In this chapter you will find important information about

- Inspection,
- Maintenance and
- Repair.

ATTENTION!

Properly performed regular maintenance is an essential prerequisite for

- **operational safety,**
- **failure-free operation,**
- **long service life of the machine and**
- **the quality of the products which you manufacture.**



Installations and equipment from other manufacturers must also be in good order and condition.

ENVIRONMENTAL PROTECTION

During work on the spindle head, please make sure that

- **collecting containers with sufficient capacity for the amount of liquid to be collected are used.**
- **liquids and oils should not be split on the ground.**



Clean up any spilt liquid or oils immediately using proper oil-absorption methods and dispose of them in accordance with current legal requirements on the environment.

Collect leakages

Do not re-introduce liquids spilt outside the system during repair or as a result of leakage from the reserve tank; collect them in a collecting container for disposal.

Disposal

Never dump oil or other environmentally hazardous substances which are harmful to the environment in water inlets, rivers or channels.

Used oils must be delivered to a collection centre. Please consult your supervisor for further information on your nearest collection point.

6.1 Safety

WARNING!

The consequences of incorrect maintenance and repair work may include:

- **very serious injury to personnel working on the machine,**
- **damage to the machine.**



Only qualified personnel should carry out maintenance and repair work on the machine.

6.1.1 Preparation

WARNING!

Only work on the machine if it has been disconnected from the power supply.

Attach a warning sign which secures against unauthorized switching on.



6.1.2 Restarting

Before restarting, run a safety check.  Safety check on page 11



WARNING!


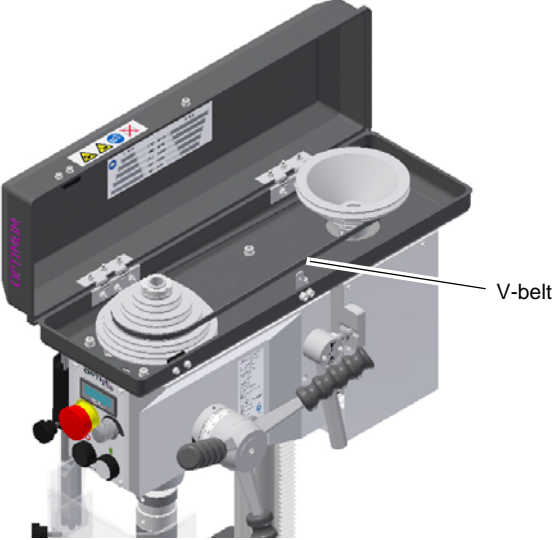
Before starting the machine you must be sure that

- no dangers generated for persons,
- the machine is not damaged.




6.2 Inspection and maintenance

The type and level of wear depends to a large extent on the individual usage and operating conditions. Any indicated intervals therefore are only valid for the corresponding approved conditions.


Interval	Where?	What?	How?
Start of shift After each maintenance or repair work	Bench drill	Examination for outside damages. ☞ Safety check on page 11	
Every month	Drill column	Oiling	<p>→ Lubricate the drill column regularly with commercial oil, machine oil, engine oil.</p>  <p>Img.6-1:</p>
Every 6 months	V-belts at the drill head	Visual inspection	<p>→ Check whether the V-belts have become porous and worn.</p>  <p>Img.6-2: V-belt housing</p>

B16H_GB_5.fm


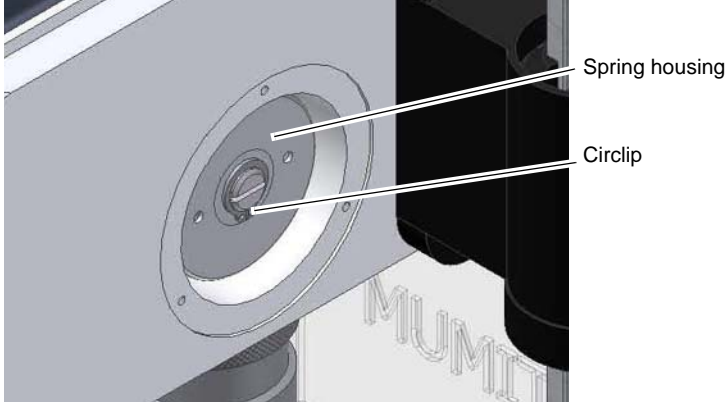
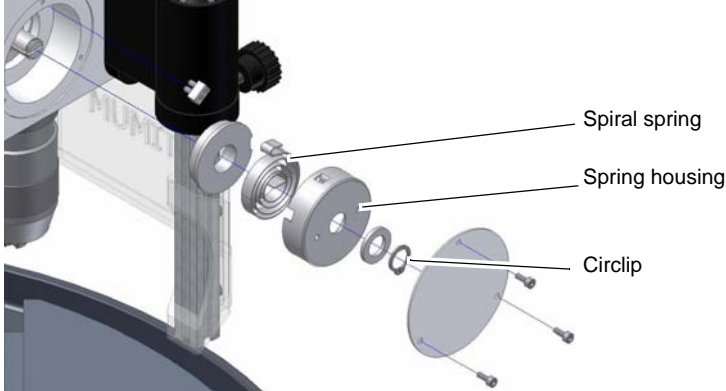


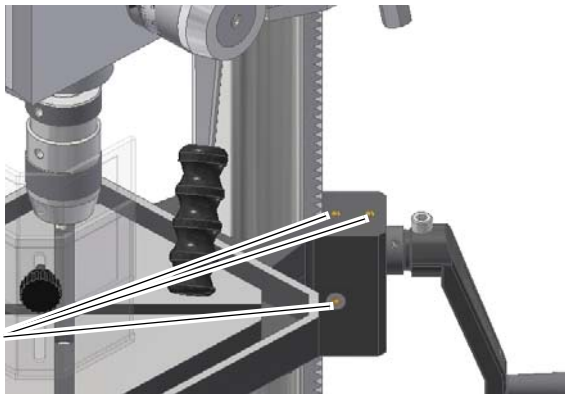Interval	Where?	What?	How?
Every 6 months	Electronics	Testing	<p>➔ Check the electrical equipment / parts of the bench drill.</p> <p>👉 Qualification of personnel on page 9</p>
Every month	Oiler cup	Oiling	<p>➔ Lubricate all oiler cups with machine oil, do not use grease guns or the like.</p> <p>👉 Operating material on page 17</p>  <p>Img. 6-3: Oiler cup</p>

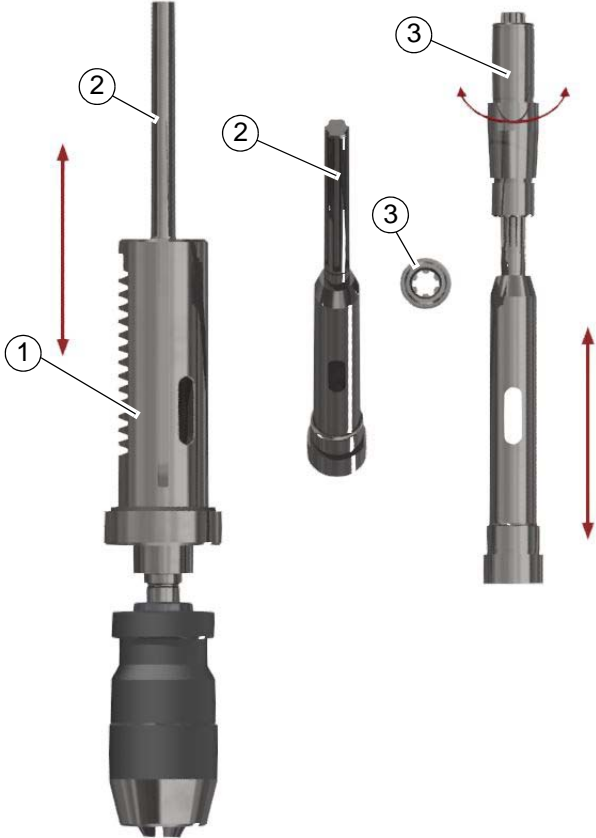

Interval	Where?	What?	How?
in case of need	Toothing of the spindle	Lubrication	<p>Any unusual rattling noises can be eliminated by regreasing. The sleeve (1) moves downwards or upwards with the toothed spindle (2) in the fixed driven sleeve (3) during drill feed. The noises are caused by the necessary clearance between the two toothings of the sleeve and spindle. The grease in the delivery condition may have been used up.</p>  <p>Img.6-4:</p> <p>Regreasing is carried out from above via the spindle drive. Apply grease at the visible toothed area of the spindle. It is recommended to use a grease which can remain permanently inside the toothings. The grease "Staburag NBU 30 PTM" from Klüber is recommended and has proved to be a successful assembly grease for clearance fits.</p>



Interval	Where?	What?	How?
as required	Spindle return spring	Readjusting	<p>CAUTION!</p> <p> Parts can be thrown towards you. When disassembling the key housing, please make sure that the machine is only maintained and prepared by qualified staff.</p>  <p>Img. 6-5: Spindle return spring</p>  <p>Img. 6-6: Exploded view spring barrel</p>

INFORMATION

The spindle bearing is lifetime-lubricated. It is not necessary to lubricate it again.





6.3 Repair

6.3.1 Customer service technician

For any repair work request the assistance of an authorised customer service technician. Contact your specialist dealer if you do not have customer service's information or contact Stürmer Maschinen GmbH in Germany who can provide you with a specialist dealer's contact information. Optionally, the

Stürmer Maschinen GmbH

Dr. Robert-Pfleger-Str. 26

D- 96103 Hallstadt

can provide a customer service technician, however, the request for a customer service technician can only be made via your specialist dealer.

If the repairs are carried out by qualified technical personnel, they must follow the indications given in these operating instructions.

Optimum Maschinen Germany GmbH accepts no liability nor does it guarantee against damage and operating malfunctions resulting from failure to observe these operating instructions.

For repairs, only use

- faultless and suitable tools only,
- original parts or parts from series expressly authorised by Optimum Maschinen Germany GmbH.

7 Ersatzteile - Spare parts

7.1 Ersatzteilbestellung - Ordering spare parts

Bitte geben Sie folgendes an - *Please indicate the following :*

- Seriennummer - *Serial No.*
- Maschinenbezeichnung - *Machines name*
- Herstellungsdatum - *Date of manufacture*
- Artikelnummer - *Article no.*

Die Artikelnummer befindet sich in der Ersatzteilliste. *The article no. is located in the spare parts list.* Die Seriennummer befindet sich am Typschild. *The serial no. is on the rating plate.*

7.2 Hotline Ersatzteile - Spare parts Hotline



+49 (0) 951-96555 -118
ersatzteile@stuermer-maschinen.de





7.3 Service Hotline




+49 (0) 951-96555 -100
service@stuermer-maschinen.de




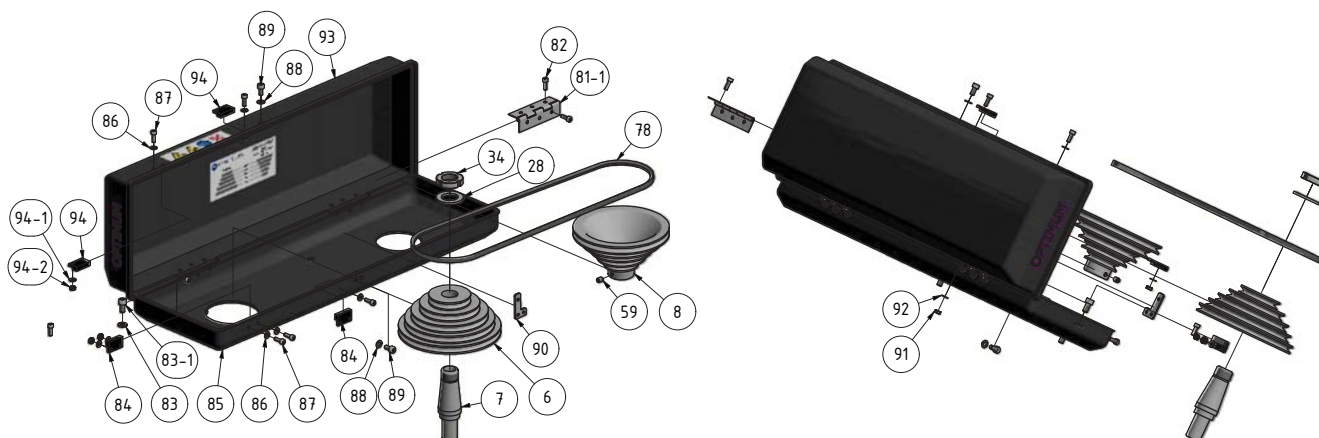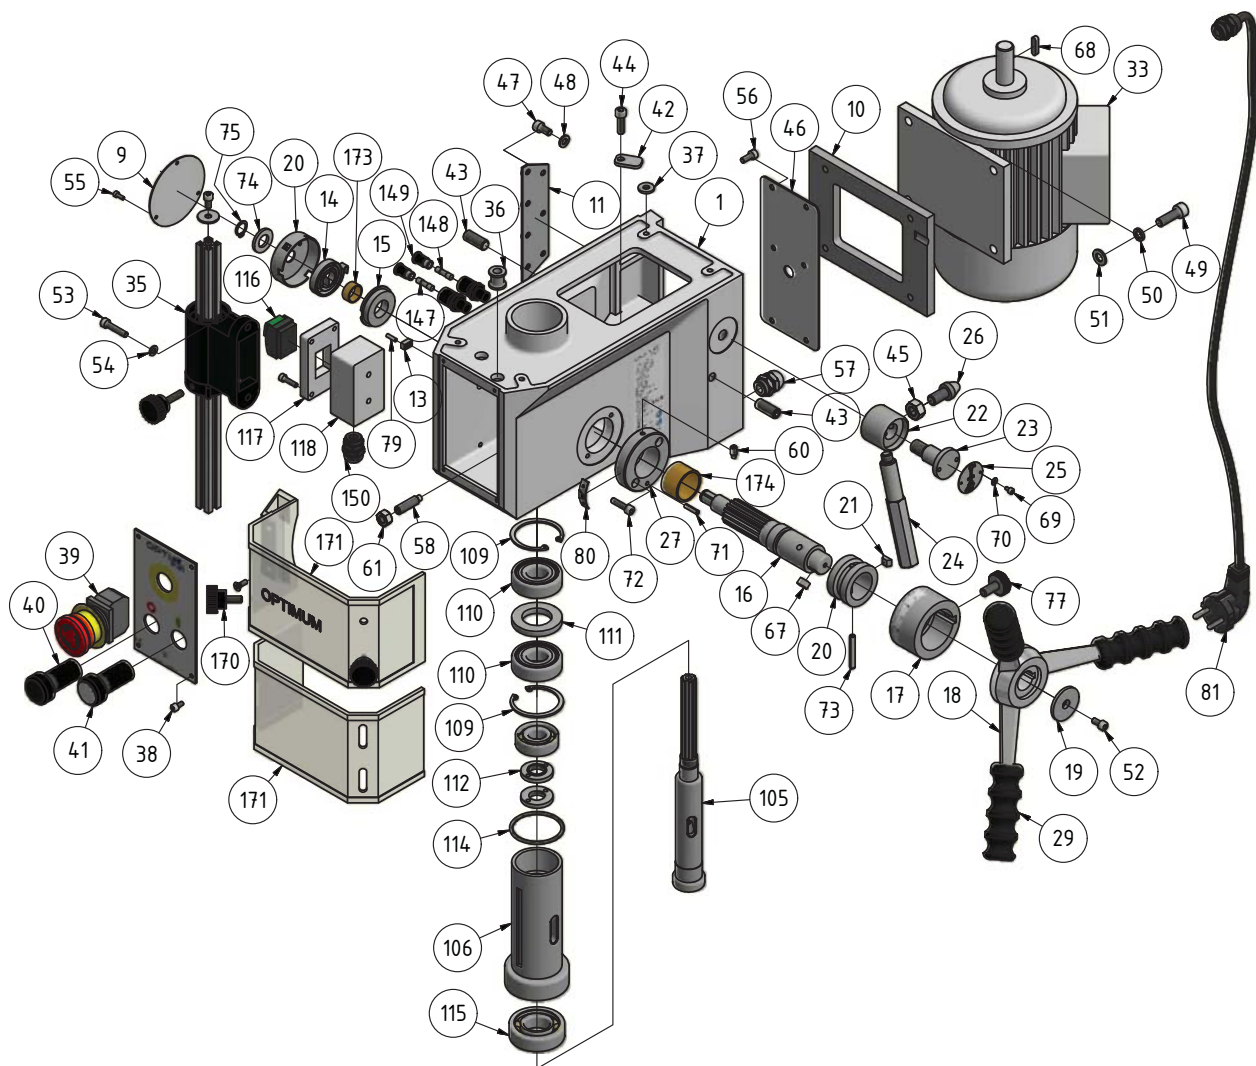

7.6 Säule und Bohrtisch - Column and drilling table

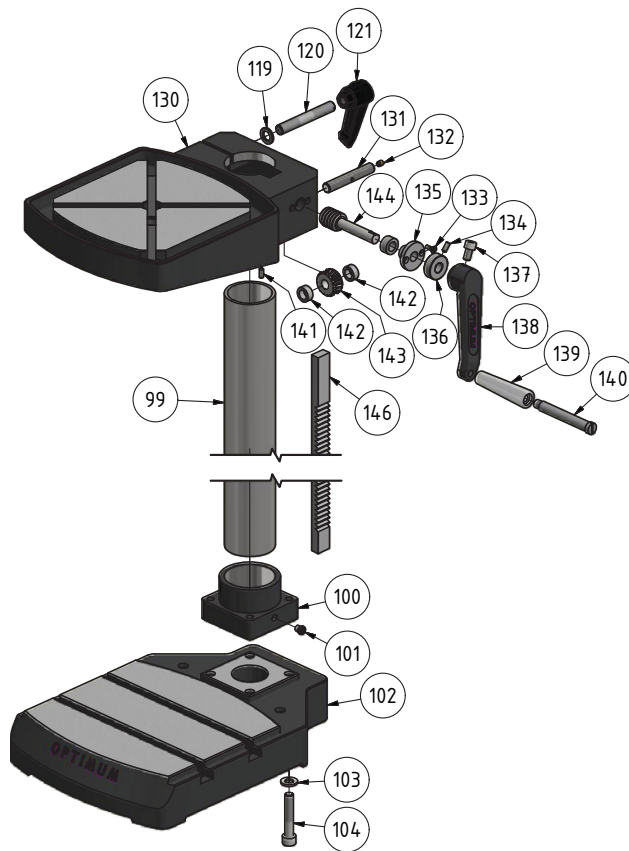

7.7 Säule und Bohrtisch - Column and drilling table - ab / from 2019

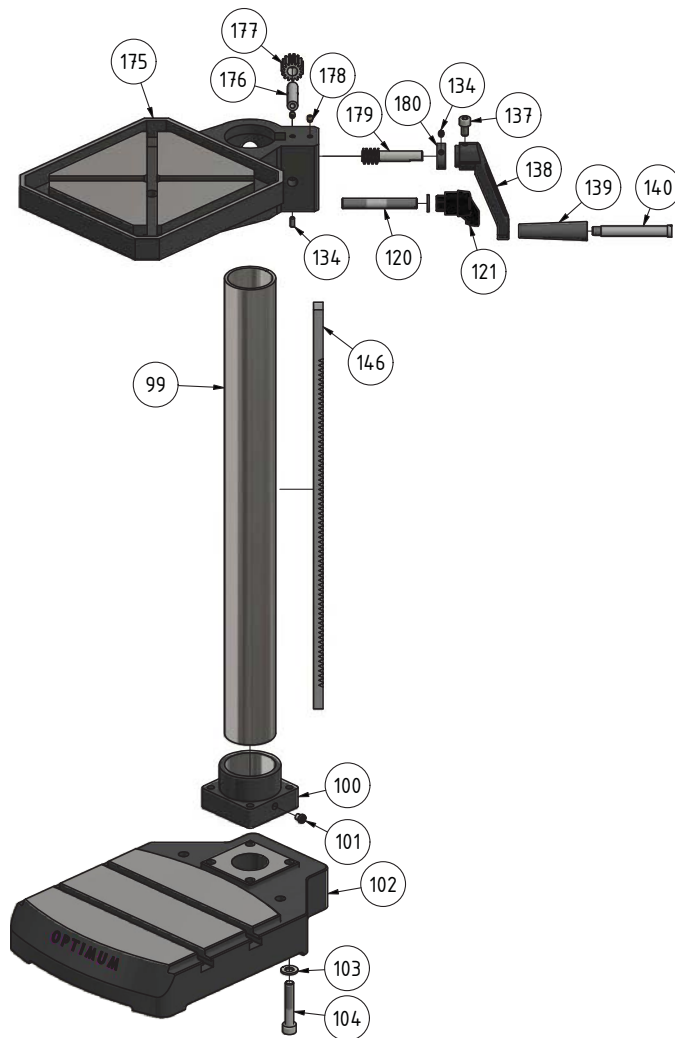

Säule und Bohrtisch B16H - Column and drilling table B16H

7.7.1 Ersatzteilliste - Parts list

B16H					
Pos.	Bezeichnung	Designation	Menge	Grösse	Artikelnummer
			Qty.	Size	Item no.
1	Bohrkopf	Drilling head	1		
6	Riemenscheibe	Pulley	1		0302021606
7	Welle	Shaft	1		
8	Riemenscheibe Motor	Pulley motor	1		0302021608
9	Abdeckplatte	Covering plate	1		0302021609
10	Motorplatte	Engine plate	1		
11	Halteplatte	Holder plate	1		
13	Spanner Spiralfeder	Spanner spiral spring	1		
14	Spiralfeder inkl. Gehäuse	Spiral spring incl. Housing	1		03020218120
15	Buchse verzahnte Welle	Bushing toothed shaft	1		0302021812
16	Schaftrizel mit Nabe	Shank pinion	1		0302021811
17	Skalenring	Scale ring	1		0302021812
18	Pinolenvorschubgriff	Spindle sleeve feed grip	1		0302021822
19	Scheibe	Washer	1		0302021823
20	Buchse Skala	Bushing scale	1		0302021824
21	Nutenstein	Sliding block	1		
22	Buchse Schnellspanngriff	Bushing quick action grip	1		0302021826
23	Klemmschraube	Clamping screw	1		0302021827
24	Schnellspanngriff	Quick action grip	1		0302021829
25	Schild „Spannen“ „Lösen“	Label „spans“ „release“	1		0302021830
26	Bolzen Spannen	Bolt span	1		0302021828
27	Führung verzahnte Welle	Lead toothed shaft	1		0302021813
28	Scheibe	Washer	1		
29	Gummigriff	Rubber grup	3		0302021832
33	Motor	Motor	1	230V 0,55 kW	0302021633
33-1	Kondensator	Cpacitor	1	450V AC	03020216331
33	Motor	Motor	1	400V 0,55 kW	0302021733
34	Nutmutter	Groove nut	1	GB 810-88 - M22x1,5	0302021879
35	Bohrfutterschutz komplett	Drill chuck protection compete	1		03003231125
35	Halterung Bohrfutterschutz	Fixing drill chuck proetection	1		03008131201CPL
36	Buchse	Bushing	1		0302021843
37	Scheibe	Washer	1		
38	Innensechskantschraube	Socket head screw	4	GB 70-85 - M4 x 8	
39	Schalter Not-Aus	Emergency- stop switch	1	600V 10A	0460058
40	Drucktaster Aus	Bush button Off	1	230V 5A	0302024186
41	Drucktaster Ein	Bush button On	1	230V 5A	0302024185
42	Anschlag	Stopper	1		0302021816
43	Gewindestift	Setscrew	2	GB 77-85 - M10 x 25	

B16H_parts.fm

44	Innensechskantschraube	Socket head screw	1	GB 70-85 - M6 x 20	
45	Sechskantmutter	Hexagonal nut	1	M10	
46	Platte	Plate	1		
47	Innensechskantschraube	Socket head screw	7	GB 70-85 - M6 x 12	
48	Scheibe	Washer	7	GB 97.1-85 - 6	
49	Innensechskantschraube	Socket head screw	4	GB 70-85 - M8 x 25	
50	Scheibe	Washer	4	GB 93-87 - 8	
51	Scheibe	Washer	4	GB 97.1-85 - 8	
52	Innensechskantschraube	Socket head screw	1	GB 70-85 - M5 x 10	
53	Innensechskantschraube	Socket head screw	2	GB 70-85 - M5 x 25	
54	Scheibe	Washer	2	GB 97.1-85 - 5	
55	Innensechskantschraube	Socket head screw	3	GB 70-85 - M3 x 8	
56	Innensechskantschraube	Socket head screw	4	GB 70-85 - M5 x 12	
57	Kabelverschraubung	Cable connection	1		
58	Gewindestift	Set screw	1	GB 79-85 - M8 x 30	
59	Gewindestift	Set screw	1	GB 80-85 - M6 x 8	
60	Gewindestift	Set screw	1	GB 79-85 - M6 x 12	
61	Sechskantmutter	Hexagonal nut	1	M8	
65	Scheibe	Washer	1	GB 97.1-85 - 6	
66	Innensechskantschraube	Socket head screw	1	GB 70-85 - M6 x 10	
67	Paßfeder	Key	1	6 x 12	042P6612
68	Paßfeder	Key	1	5 x 20	042P5520
69	Innensechskantschraube	Socket head screw	2	GB 70-85 - M3 x 5	
70	Scheibe	Washer	2		
71	Spannstift	Spring pin	1	GB 879-86 - 4 x 16	
72	Innensechskantschraube	Socket head screw	2	GB 70-85 - M5 x 20	
73	Spannstift	Spring pin	1	GB 879-86 - 5 x 36	
74	Scheibe	Washer	1		
75	Sicherungsring	Circlip	1	GB 894.1 - 12	
77	Griffschraube	Knurled screw	1		0302021831
78	Keilriemen	V-belt	1		0302021885
79	Spannstift	Split pin	2	3x12	
80	Anzeige Skala	Mechanical indicator scale	1		0302021833
81	Stecker- Netzanschluss	Connector electric supply	1	B16H 230V only	
81-1	Scharnier	Articulation	2		
82	Innensechskantschraube	Socket head screw	12	GB 70-85 - M4 x 12	
83	Scheibe	Washer	4	GB 97.1-85 - 6	
83-1	Innensechskantschraube	Socket head screw	4	GB 70-85 - M6 x 12	
84	Reed Kontakt	Reed contact	2	PS-3150	0302024192
85	Riemengehäuse Unterteil	Belt housing bottom part	1		
86	Scheibe	Washer	4	GB 97.1-85 - 4	
88	Scheibe	Washer	3	GB 97.1-85 - 5	

89	Innensechskantschraube	Socket head screw	3	GB 70-85 - M5 x 10	
90	Platte Schließer	Plate closer	1		
91	Sechskantmutter	Hexagonal nut	12	M4	
92	Scheibe	Washer	12	GB 97.1-85 - 4	
93	Riemengehäuse Oberteil	Belt housing upper part	1		03020218102
94	Gegenstück Reedkontakt	Counterpart reed contact	2		
94-1	Scheibe	Washer	4	GB 97.1-85 - 4	
94-2	Sechskantmutter	Hexagonal nut	4	M4	
99	Bohrsäule	Column	1		
100	Halterung	Attachment	1		03020218124
101	Gewindestift	Setscrew	1	GB 79-85 - M10 x 10	
102	Standfuss	Base	1		03020216102
103	Scheibe	Washer	12	GB 97.1-85 - 10	
104	Innensechskantschraube	Socket head screw	3	GB 70-85 - M10 x 55	
105	Spindel	Spindle	1		
106	Pinole	Spindle sleeve	1		0302021802
109	Sicherungsring	Retaining ring	2		
110	Kugellager	Ball bearing	2	6204	0406204R
111	Abstandsring	Spacer	1		
112	Spannmutter	Clamping nut	2		
114	O-Ring	O-Ring	1		
115	Kugellager	Ball bearing	1	6005	0406005R
116	Hauptschalter	Main switch	1		0302024187
117	Abdeckung	Cover	1		
118	Schaltergehäuse	Switch housing	1		03020216118
119	Scheibe	Washer	1		
120	Klemmschraube	Clamping screw	1		03020218120
121	Klemmhebel	Clamping lever	1		03020218121
130	Bohrtisch	Drilling machine table	1		03020219130
131	Welle	Shaft	1		03020219131
132	Schmiernippel	Lubrication cup	1		
133	Senkschraube	Countersunk screw	2	ISO7046/ M4x12	
134	Gewindestift	Grub screw	1	GB80-85/ M5x12	
135	Führungsbuchse	Guide bush	1		03020219135
136	Buchse	Bush	1		03020219136
137	Innensechskantschraube	Socket head screw	1	GB70-85/ M8x12	
138	Kurbel	Crank lever	1		03020219138
139	Griff B 16 H Vario	Grip B 16 H Vario	1		03020219139
140	Schraube	Screw	1		
141	Gewindestift	Grub screw	1	GB80-85/ M5x12	
142	Abstandsring	Spacer ring	2		03020219142
143	Schneckenrad	Worm gear	1		03020219143
144	Antriebswelle	Input shaft	1		03020219144
146	Zahnstange	Gear rack	1		03020219146
147	Sicherung	Fuse	1	3A	

B16H_parts.fm

148	Sicherung	Fuse	1	10A	
149	Sicherungsgehäuse kpl.	Fuse housing cpl.	2		
150	Kabelverschraubung	Cable connector	1		
170	Rändelschraube	Knurled screw	2		
171	Bohrfutterschutz	Deill chuck safety	1		03003171207
173	Gleitlager	Plain bearing	1	16x18x8	03020216173
174	Gleitlager	Plain bearing	1	28x32x20	03020216174
175	Bohrtisch	Drill Table	1	ab / from 2019	03020219175
176	Welle	Shaft	1		03020219176
177	Zahnrad	Gear	1		03020219177
178	Schmiernippel	Lubrication cup	3	6	0340105
179	Welle	Shaft	1		03020219179
180	Ring	Ring	1		03020219180

7.8 Maschinenschilder - Machine labels

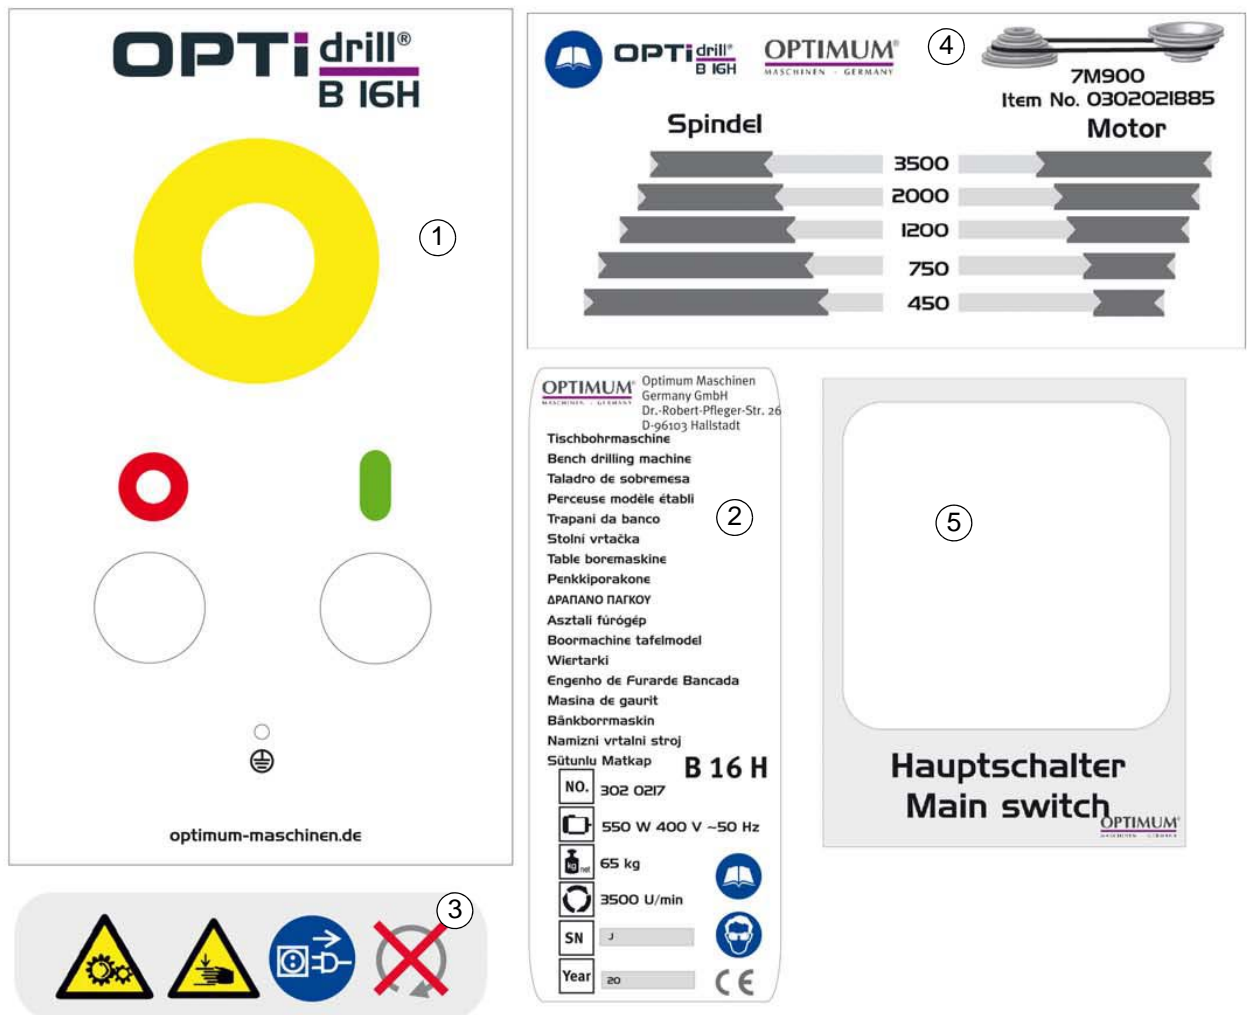


Abb. 7-1: Maschinenschilder - Machine labels

Ersatzteilliste Maschinenschilder - Spare part list machine labels					
Pos.	Bezeichnung	Designation	Menge	Grösse	Artikelnummer
			Qty.	Size	Article no.
1	Schild Frontabdeckung	Front cover lable	1	B16H	03020216L01
2	Maschinenschild	Machine lable	1	B16H	
3	Schild Sicherheit	Safety lable	1		
4	Schild Drehzahlen	Rotation speed lable	1	B16H	

7.9 Schaltplan - Wiring diagram

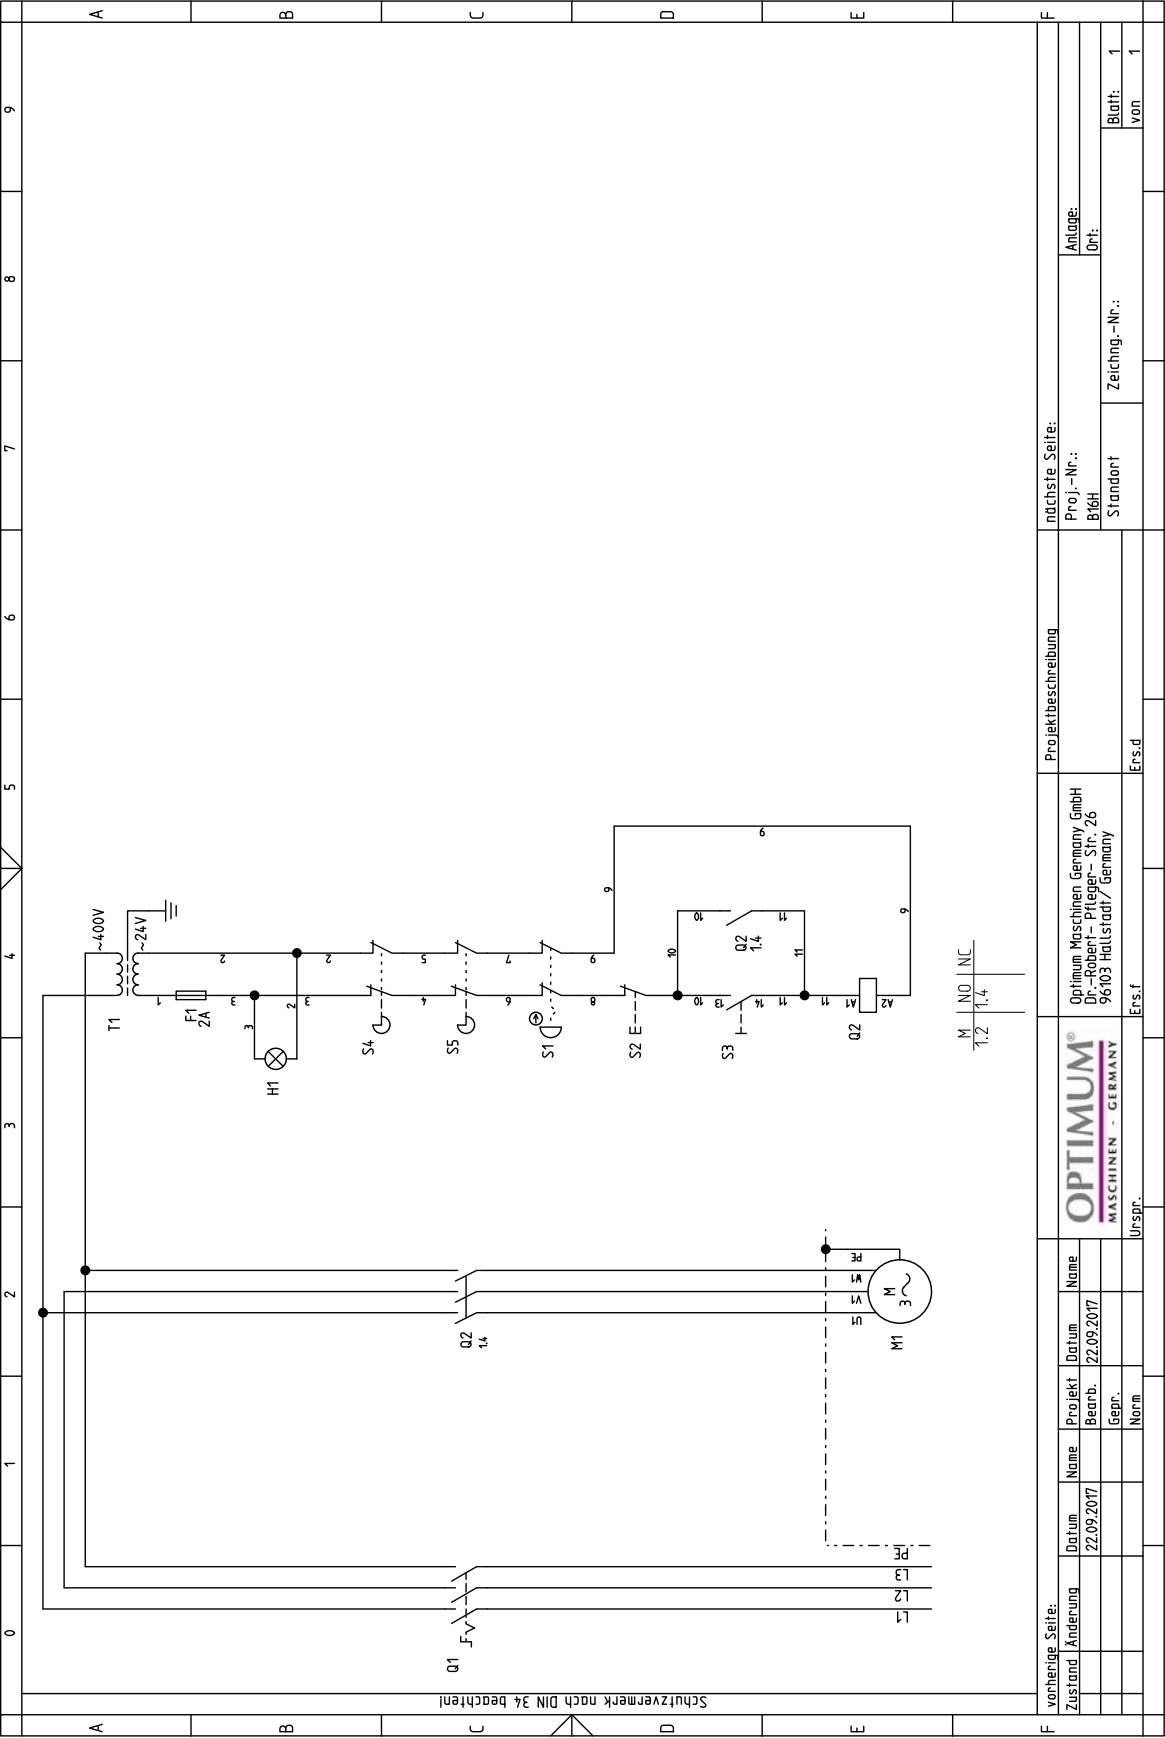


Abb.7-2: Schaltplan - Wiring diagram B16H

B16H_parts.im

7.9.1 Ersatzteilliste elektrische Komponenten - Parts list electrical components

B16H					
Pos.	Bezeichnung	Designation	Menge	Grösse	Artikelnummer
			Qty.	Size	Item no.
Q1	Hauptschalter	Main switch	1		
Q2	Motorschütz	Motor contactor	1	Schneider relay LC1-K0910 B7	
M1	Antriebsmotor	Drive motor	1	230V	0302021633
M1	Antriebsmotor	Drive motor	1	400V	0302021733
T1	Transformator	Transformer	1		
F1	Sicherung	Fuse	1	6A	
H1	Betriebsleuchte	Work light	1		
S1	Not-Halt Schalter	Emergency stop button	1		0460049
S2	Taster Stop	Button OFF	1		0302024186
S3	Taster Ein	Button ON	1		0302024185
S4	Schalter Bohrfutterschutz	Drill chuck switch	1		
S5	Schalter Riemenabdeckung	Belt cover switch	1		



8 Malfunctions

Malfunction	Cause/ possible effects	Solution
Noise during work.	<ul style="list-style-type: none"> Spindle is too little lubricated Tool is blunt or wrongly clamped 	<ul style="list-style-type: none"> Lubricate spindle (only possible when disassembled) Use new tool and check tension (fixed setting of the bit, drill chuck and taper mandril)
Bit „burnt“	<ul style="list-style-type: none"> Drill speed too high /feed too high Chips do not come out of the drill hole. Drill blunt No or too little cooling 	<ul style="list-style-type: none"> Select another speed Extract drill more often during work Sharpen or use new drill Use cooling agent
Drill tip is running off centre, the drilled hole is non-round	<ul style="list-style-type: none"> Hard points on the workpiece Length of the cutting spirals/or angles on the tool are unequal Drill deformed 	<ul style="list-style-type: none"> Use new drill
Drill is defective	<ul style="list-style-type: none"> No base / support used. 	<ul style="list-style-type: none"> Use support and clamp it with the workpiece
Drill is running non-round or shaking	<ul style="list-style-type: none"> Bit deformed Bearing worn down Drill is not correctly clamped. Drill chuck defective 	<ul style="list-style-type: none"> Use new drill Have the spindle bearings replaced Correctly clamp drill Replace the drill chuck
The drill chuck or the taper mandrel cannot be inserted.	<ul style="list-style-type: none"> Dirt, grease or oil on the taper inside of the drill chuck or on the taper surface of the drill spindle 	<ul style="list-style-type: none"> Clean surfaces well Keep surfaces free of grease
Motor does not start.	<ul style="list-style-type: none"> Motor is wrongly connected Fuse is defective 	<ul style="list-style-type: none"> Have it checked by qualified
Motor is overheating and there is no power	<ul style="list-style-type: none"> Motor overloaded? Too low mains voltage Motor is wrongly connected 	<ul style="list-style-type: none"> Reduce feed Disconnect immediately and have it checked by authorized personnel Have it checked by qualified
Precision of the work deficient	<ul style="list-style-type: none"> Irregularly heavy or tensed workpiece Inexact horizontal position of the work-piece holder 	<ul style="list-style-type: none"> Balance the piece statically and secure without straining Adjust workpiece-holder
Drilling spindle sleeve does not return to its initial position	<ul style="list-style-type: none"> Spindle return spring does not work Locking bolt inserted 	<ul style="list-style-type: none"> Check spindle return spring, replace it, if necessary Pull out locking pin
The drilling sleeve may not be moved downwards.	<ul style="list-style-type: none"> Locking bolt inserted Drill depth adjustment no released 	<ul style="list-style-type: none"> Pull out locking pin Release drill depth adjustment
Spindle bearing overheating	<ul style="list-style-type: none"> Bearing worn down Bearing pretension is too high Working at high drilling speed over a longer period of time. 	<ul style="list-style-type: none"> Replacing Increase bearing clearance for fixed bearing (taper roller bearing) Reduce drill speed and feed rate

B16H_GB_7.fm



Malfunction	Cause/ possible effects	Solution
Rattle the spindle if the workpiece surface is rough.	<ul style="list-style-type: none"> • Excessive slack in bearing. • Spindle moves up and down • Adjustment strip loose • Clamping chuck is loose • Tool is blunt. • Workpiece is loose 	<ul style="list-style-type: none"> • Reduce bearing clearance or replace bearing • Readjust bearing clearance (fixed bearing)? • Adjust strip to the correct slack using the adjusting screw • Check, re-tighten • Sharpen or renew the tool. • Clamp the workpiece firmly.



9 Appendix

9.1 Copyright

This document is protected by copyright. All derived rights are reserved, especially those of translation, re-printing, use of figures, broadcast, reproduction by photo-mechanical or similar means and recording in data processing systems, either partial or total.

Subject to technical changes without notice.

9.2 Terminology/Glossary

Term	Explanation
Drill chuck	Drill bit adapter
Drill head	Upper part of the bench drill
Drill sleeve	Fixed hollow shaft which runs in the drill spindle.
Drilling spindle	Shaft activated by the motor
Drilling table	Supporting surface, clamping surface
Taper mandrel	Cone of the drill or of the drill chuck
Spindle sleeve lever	Manual operation for the drill feed
Quick-action drill chuck	Drill holding fixture to be clamped manually.
Workpiece	Part to be drilled, part to be machined.
Tool	Drill bit, countersink, etc.

9.3 Change information operating manual

Chapter	Short summary	new version number
4.2.2; 4.8; 6.2	Speeds B16HV	1.1.3
2.1	Electrical connection	1.1.4
CE	EC declaration	1.1.5
CE	EMC 2014/30/EU & LVD 2014/35/EU	1.1.6
2	B16H 230V - B16H 400V	1.1.7
2	B16HV Drilling capacity	1.1.7
parts	Permanently lubricated plain bearings, pos. 173 , 174	1.1.8
parts	Update of the spare parts list (09 / 2018)	1.1.8
parts + B16HV	Update of spare parts list (drilling table new) + B16HV removed from manual	2.0
3	Interdepartmental transport	2.0.1



9.4 Liability claims/warranty

Besides the legal liability claims for defects of the customer towards the seller, the manufacturer of the product, OPTIMUM GmbH, Robert-Pfleger-Straße 26, D-96103 Hallstadt, does not grant any further warranties unless they are listed below or were promised as part of a single contractual provision.

- Liability or warranty claims are processed at OPTIMUM GmbH's discretion either directly or through one of its dealers.
Any defective products or components of such products will either be repaired or replaced by components which are free from defects. Title to replaced products or components is transferred to OPTIMUM Maschinen Germany GmbH.
- The automatically generated original proof of purchase which shows the date of purchase, the type of machine and the serial number, if applicable, is the precondition in order to assert liability or warranty claims. If the original proof of purchase is not presented, we are not able to perform any services.
- Defects resulting from the following circumstances are excluded from liability and warranty claims:
 - Using the product beyond the technical options and proper use, in particular due to overstraining of the device.
 - Any defects arising by one's own fault due to faulty operations or if the operating manual is disregarded.
 - Inattentive or incorrect handling and use of improper equipment
 - Unauthorized modifications and repairs
 - Insufficient installation and safeguarding of the machine
 - Disregarding the installation requirements and conditions of use
 - atmospheric discharges, overvoltage and lightning strokes as well as chemical influences
- Neither are the following items covered by liability or warranty claims:
 - Wearing parts and components which are subject to normal and intended wear, such as V-belts, ball bearings, lighting, filters, seals, etc.
 - Non reproducible software errors
- Any services, which OPTIMUM GmbH or one of its agents performs in order to fulfil any additional warranty are neither an acceptance of the defects nor an acceptance of its obligation to compensate. These services neither delay nor interrupt the warranty period.
- The court of jurisdiction for legal disputes between businessmen is Bamberg.
- If any of the aforementioned agreements is totally or partially inoperative and/or invalid, a provision which nearest approaches the intent of the guarantor and remains within the framework of the limits of liability and warranty which are specified by this contract is deemed agreed.



9.5 Storage

ATTENTION!

Incorrect and improper storage might result in damage or destruction of electrical and mechanical machine components.

Store packed and unpacked parts only under the intended environmental conditions.

Follow the instructions and information on the transport box:



- Fragile goods (Goods require careful handling)



- Protect against moisture and humid environment



- Prescribed position of the packing case (Marking of the top surface - arrows pointing to the top)



- Maximum stacking height

Example: not stackable - do not stack further packing case on top of the first one.



Consult Optimum Maschinen Germany GmbH if the machine and accessories are stored for more than three months or are stored under different environmental conditions than those specified here Information on page 5.

9.6 Advice for disposal / Options of reuse:

Please dispose of your equipment in an environmentally friendly manner, by not placing waste in the environment but in a professional manner.

Please do not simply throw away the packaging and later the disused machine, but dispose of both in accordance with the guidelines laid down by your city council/local authority or by an authorised disposal company.



9.6.1 Decommissioning

CAUTION!

Immediately decommission used machines in order to avoid later misuse and endangering of the environment or of persons.



- Unplug the power cord.
- Cut the connection cable.
- Remove all operating materials from the used device which are harmful to the environment.
- If applicable remove batteries and accumulators.
- Disassemble the machine if required into easy-to-handle and reusable assemblies and component parts.
- Dispose of machine components and operating fluids using the intended disposal methods.

9.6.2 Disposal of new device packaging

All used packaging materials and packaging aids from the machine are recyclable and generally need to be supplied to the material reuse.

The packaging wood can be supplied to the disposal or the reuse.

Any packaging components made of cardboard box can be chopped up and supplied to the waste paper collection.

The films are made of polyethylene (PE) and the cushion parts are made of polystyrene (PS). These materials can be reused after reconditioning if they are passed to a collection station or to the appropriate waste management enterprise.

Only forward the packaging materials correctly sorted to allow direct reuse.

9.6.3 Disposal of the old device

INFORMATION

Please take care in your interest and in the interest of the environment that all component parts of the machine are only disposed of in the intended and admitted way.



Please note that the electrical devices comprise a variety of reusable materials as well as environmentally hazardous components. Please ensure that these components are disposed of separately and professionally. In case of doubt, please contact your municipal waste management. If appropriate, call on the help of a specialist waste disposal company for the treatment of the material.

9.6.4 Disposal of electrical and electronic components

Please make sure that the electrical components are disposed of professionally and according to the statutory provisions.

The device is composed of electrical and electronic components and must not be disposed of as household waste. According to the European Directive regarding electrical and electronic used devices and the implementation of national legislation, used power tools and electrical machines need to be collected separately and supplied to an environmentally friendly recycling centre.

As the machine operator, you should obtain information regarding the authorised collection or disposal system which applies for your company.

Please make sure that the electrical components are disposed of professionally and according to the legal regulations. Please only throw depleted batteries in the collection boxes in shops or at municipal waste management companies.



9.6.5 Disposal of lubricants and coolants

ATTENTION!

Please imperatively make sure to dispose of the used coolant and lubricants in an environmentally compatible manner. Observe the disposal instructions of your municipal waste management companies.



INFORMATION

Used coolant emulsions and oils should not be mixed since it is only possible to reuse oils without pre-treatment when they have not been mixed.

The disposal instructions for used lubricants are made available by the manufacturer of the lubricants. If necessary, request the product-specific data sheets.



9.7 Disposal via municipal collection facilities

Disposal of used electrical and electronic components

(Applicable in the countries of the European Union and other European countries with a separate collecting system for those devices).

The sign on the product or on its packing indicates that the product must not be handled as common household waste, but that it needs to be disposed of at a central collection point for recycling. Your contribution to the correct disposal of this product will protect the environment and the public health. Incorrect disposal constitutes a risk to the environment and public health. Recycling of material will help reduce the consumption of raw materials. For further information about the recycling of this product, please consult your District Office, municipal waste collection station or the shop where you have purchased the product.



9.8 Product follow-up

We are required to perform a follow-up service for our products which extends beyond shipment.

We would be grateful if you could inform us of the following:

- Modified settings
- Any experiences with the bench drill which might be important for other users
- Recurring malfunctions

Optimum Maschinen Germany GmbH

Dr. Robert-Pfleger-Str. 26

D-96103 Hallstadt

Fax +49 (0) 951 - 96 96555 - 888

email: info@optimum-maschinen.de



EC - Declaration of Conformity

according to Machinery directive 2006/42/EC, Annex II 1.A

The manufacturer / distributor Optimum Maschinen Germany GmbH
Dr.-Robert-Pfleger-Str. 26
D - 96103 Hallstadt, Germany

hereby declares that the following product

Product designation: Drilling machine

Type designation: B16H

fulfills all the relevant provisions of the directive specified above and the additionally applied directives (in the following) - including the changes which applied at the time of the declaration.

Description:

Hand-controlled drilling machine.

The following additional EU directives have been applied:

EMC Directive 2014/30/EU ; Restriction of the use of certain hazardous substances in electrical and electronic equipment 2015/863/EU

The following harmonized standards were applied:

EN 12717: 2001 - Machine tools - Safety - Drilling machines

EN 60204-1 - Safety of machinery - Electrical equipment of machines - Part 1: General requirements

EN 13849-1:2015 - Safety of machinery - Safety related parts of controls - Part 1: General design principles

EN 13849-2:2012 - Safety of machinery - Safety related parts of controls - Part 2: Validation

EN ISO 12100:2013 - Safety of machinery - General principles for design - Risk assessment and risk reduction

Name and address of the person authorized to compile the technical file:

Kilian Stürmer, phone: +49 (0) 951 96555 - 800

Kilian Stürmer (CEO, General Manager)

Hallstadt, 2019-12-11



Index

A		T	
Accident report	15	Table cutting speeds	30
Assembly	20	Technical specification	16
C		Emissions	17
Classification of hazards	6	W	
Connection		Warming up the machine	22
electrical	16	Warning notes	6
Control and indicating elements	23		
Control panel B16H	24		
Copyright	52		
Customer service	38		
Customer service technician	38		
D			
Dimensions	18		
Disposal	56		
Drill chuck	26		
E			
EC - Declaration of Conformity	57		
Electronics	15		
F			
First commissioning	22		
I			
Inspection	34		
Installation	20		
Intended use	7		
Interdepartmental transport	19		
M			
Maintenance	33, 34		
Malfunctions	50		
Misuse	7		
O			
Obligations			
of the operating company	10		
user	10		
Operating material	17		
Operation	23		
P			
Personal protective equipment	14, 19		
Pictograms	6		
Product follow-up	56		
S			
Safety			
During maintenance	14		
During operation	14		
Safety devices	11		
Safety instructions	6		
Scope of delivery	20		
Service Hotline	39		
Specialist dealer	38		
Speeds	16		
Spindle seat	16		
Storage and packaging	20		

Quellenverzeichnis von Ihrem Fachhändler Metallbau Mehner

Optimum Bohrmaschinen:

- OPTIdrill B 16 H
 - OPTIdrill B 16 H Ersatzteile
 - OPTIdrill B 16 H Zubehör
- OPTIdrill DH 18V
 - OPTIdrill DH 18V Ersatzteile
 - OPTIdrill DH 18V Zubehör
- OPTIdrill Zubehör

Ihr Ersatzteil nicht in den Listen?

Direkt zum >>**Formular Download**<<. Tragen sie Ihr Maschinenmodell, samt Bauteil und Artikelnr. und wir senden Ihnen ein Angebot zeitnah zu.

Allgemeine Betriebsmittel

- Öle und Schmiermittel
- Minimalmengenschmierung

Weitere interessante Verweise

- Fräsmaschinen / CNC Fräsmaschinen / CNC Steuerungen
- Drehmaschinen / CNC Drehmaschinen
- Drucklufttechnik / Kompressoren