




Spezifikationen / Specifications

| | |
|---------------------------------------|-----------------------|
| Phase | 2 Phase |
| Step Angle / Schrittwinkel | 1.8° ± 5% / Step |
| Voltage / Nennspannung | 3.6 V |
| Current / Nennstrom | 4.0 A/Phase |
| Resistance / Widerstand | 0.9 ± 10% Ω/Phase |
| Inductance / Induktanz | 3.8 ± 20% mH/Phase |
| Holding Torque / Haltemoment | 2.8 N.m Min |
| Detent Torque / Rastmoment | 12 N.cm Max |
| Insulation Class / Isolierungs Klasse | B |
| Lead Style / Kabel Art | AWG18 UL1332 |
| Rotor Torque / Rotorträgheit | 800 g.cm ² |
| Resolution | 1000 |

Mechanische Abmessungen / Mechanical Dimensions

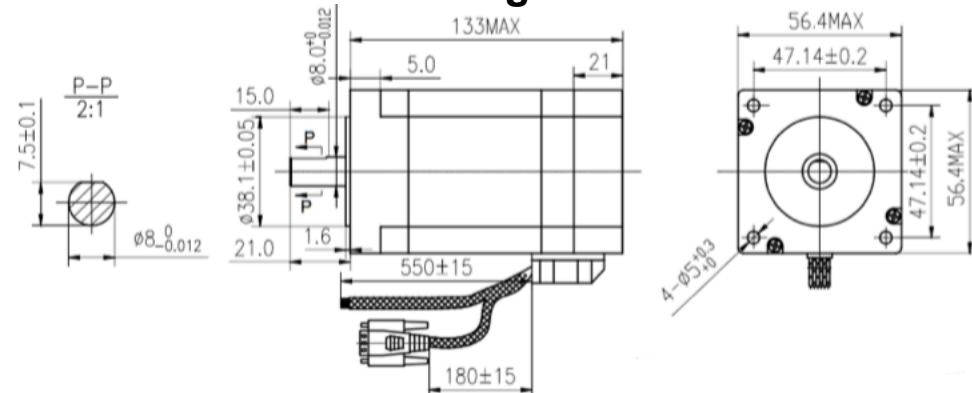

Verbindungen / Connections

Drehmomentkurve / Torque Curve

